


DKUU20 NEMA Terminal Blocks > Rail Mounting

Date:2024-05-17

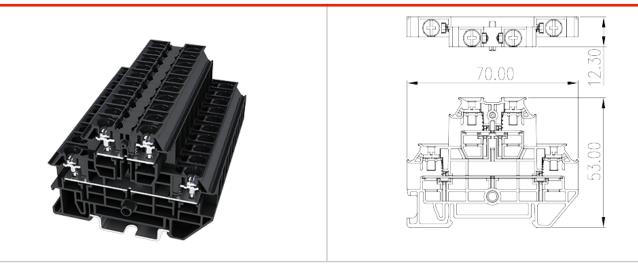

The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design. The final product is made according to engineering drawing.

Product Description

M3.5, 600V, 20A

UL Recognized

Wire Range (Group B)(AWG)26~12Rated voltage (Group B)(V)600Rated current (Group B)(A)20Wire Range (Group C)(AWG)26~12Rated voltage (Group C)(V)600Rated current (Group C)(A)20Wire Range (Group D)(AWG)26~12Rated voltage (Group D)(V)600Rated voltage (Group D)(V)600Rated current (Group D)(A)20		
Rated current (Group B)(A)20Wire Range (Group C)(AWG)26~12Rated voltage (Group C)(V)600Rated current (Group C)(A)20Wire Range (Group D)(AWG)26~12Rated voltage (Group D)(V)600	Wire Range (Group B)(AWG)	26~12
Wire Range (Group C)(AWG)26~12Rated voltage (Group C)(V)600Rated current (Group C)(A)20Wire Range (Group D)(AWG)26~12Rated voltage (Group D)(V)600	Rated voltage (Group B)(V)	600
Rated voltage (Group C)(V)600Rated current (Group C)(A)20Wire Range (Group D)(AWG)26~12Rated voltage (Group D)(V)600	Rated current (Group B)(A)	20
Rated current (Group C)(A) 20 Wire Range (Group D)(AWG) 26~12 Rated voltage (Group D)(V) 600	Wire Range (Group C)(AWG)	26~12
Wire Range (Group D)(AWG) 26~12 Rated voltage (Group D)(V) 600	Rated voltage (Group C)(V)	600
Rated voltage (Group D)(V) 600	Rated current (Group C)(A)	20
	Wire Range (Group D)(AWG)	26~12
Rated current (Group D)(A)20	Rated voltage (Group D)(V)	600
	Rated current (Group D)(A)	20


CUL Recognized

Wire Range (Group B)(AWG)	26-12
Rated voltage (Group B)(V)	600
Rated current (Group B)(A)	20
Wire Range (Group C)(AWG)	26-12
Rated voltage (Group C)(V)	600



Rated current (Group C)(A)	20
Wire Ranget (Group D)(AWG)	26-12
Rated voltage (Group D)(V)	600
Rated current (Group D)(A)	20

Drawings

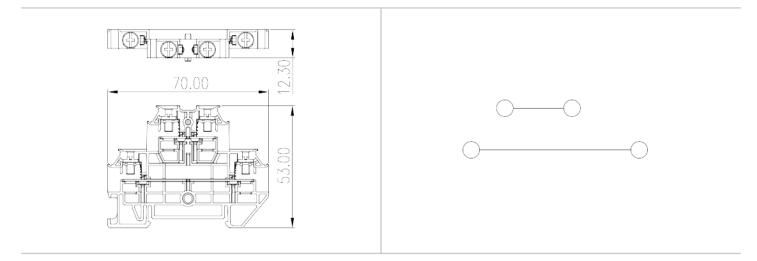

Approvals





