



3EHDRM-XXP

PCB Terminal Blocks > PCB Connector-Socket

Date:2024-05-02Version:V1

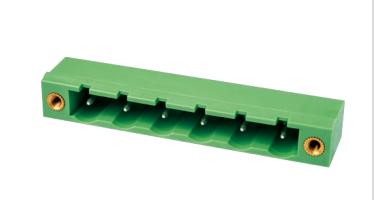

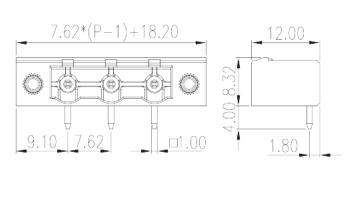

The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design.

The final product is made according to engineering drawing.

Product Description

Pitch: 7.62 mm, 300V, 25A

General information

| Short description | PCB Connector – Socket, Wave soldering |
|--|--|
| Category | PCB Connector – Socket |
| Pitch (mm) | 7.62 |
| Color | Green (default) |
| Type of locking | With threaded flange |
| Soldering method | Wave soldering |
| Length (mm) | 7.62*(P-1)+18.2 |
| Width (mm) | 12 |
| Height (mm) | 8.32 |
| Pin demensions (Thickness x Width)(mm) | 1.0x1.0 |
| PCB hole diameter (mm) | 1.6~1.7 |
| Number of positions | 02P~14P |
| Level | Single level |

Material information

| Insulation material | PA |
|---------------------|----|
|---------------------|----|

| Insulation material group | I |
|--|--------------------------------------|
| Flame retardant rating , compliant with UL94 | VO |
| Insulation resistance | □500MΩ at DC 500V |
| Conductor material | COPPER ALLOY |
| Plating of conductor surface | Tin PLATED |
| Connection data-IEC | |
| Rated voltage (V) | 800 |
| Rated current (A) | 18 |
| Rated voltage (II/2)(V) | 800 |
| Rated voltage (III/2) (V) | 630 |
| Rated voltage (III/3)(V) | 500 |
| Rated impulse voltage (II/2)(KV) | 6 |
| Rated impulse voltage (III/2)(KV) | 6 |
| Rated impulse voltage (III/3)(KV) | 6 |
| Tightening torque with flange. max (N.m) | 0.3 |
| Connection data-UL | |
| Connection data-or | |
| Rated voltage (UL/CUL Group B)(V) | 300 |
| | 300 25 |
| Rated voltage (UL/CUL Group B)(V) | |
| Rated voltage (UL/CUL Group B)(V) Rated current (UL/CUL Group B)(A) | 25 |
| Rated voltage (UL/CUL Group B)(V) Rated current (UL/CUL Group B)(A) Rated voltage (UL/CUL Group D)(V) Rated current (UL/CUL Group D)(A) | 25 300 |
| Rated voltage (UL/CUL Group B)(V) Rated current (UL/CUL Group B)(A) Rated voltage (UL/CUL Group D)(V) Rated current (UL/CUL Group D)(A) | 25 300 |
| Rated voltage (UL/CUL Group B)(V) Rated current (UL/CUL Group B)(A) Rated voltage (UL/CUL Group D)(V) Rated current (UL/CUL Group D)(A) Environment & Safety | 25 300 10 |
| Rated voltage (UL/CUL Group B)(V) Rated current (UL/CUL Group B)(A) Rated voltage (UL/CUL Group D)(V) Rated current (UL/CUL Group D)(A) Environment & Safety Finger protection (YES or NO) | 25 300 10 YES |
| Rated voltage (UL/CUL Group B)(V) Rated current (UL/CUL Group B)(A) Rated voltage (UL/CUL Group D)(V) Rated current (UL/CUL Group D)(A) Environment & Safety Finger protection (YES or NO) Operating temperature. max (°C) Operating temperature. min (°C) | 25 300 10 YES 120 |
| Rated voltage (UL/CUL Group B)(V) Rated current (UL/CUL Group B)(A) Rated voltage (UL/CUL Group D)(V) Rated current (UL/CUL Group D)(A) Environment & Safety Finger protection (YES or NO) Operating temperature. max (°C) | 25 300 10 YES 120 |
| Rated voltage (UL/CUL Group B)(V) Rated current (UL/CUL Group B)(A) Rated voltage (UL/CUL Group D)(V) Rated current (UL/CUL Group D)(A) Environment & Safety Finger protection (YES or NO) Operating temperature. max (°C) Operating temperature. min (°C) JL Recognized | 25 300 10 YES 120 -40 |
| Rated voltage (UL/CUL Group B)(V) Rated current (UL/CUL Group B)(A) Rated voltage (UL/CUL Group D)(V) Rated current (UL/CUL Group D)(A) Environment & Safety Finger protection (YES or NO) Operating temperature. max (°C) Operating temperature. min (°C) JL Recognized Rated voltage (Group B)(V) | 25 300 10 YES 120 -40 |


CUL Recognized


| Rated voltage (Group B)(V) | 300 |
|----------------------------|-----|
| Rated current (Group B)(A) | 25 |
| Rated voltage (Group D)(V) | 300 |
| Rated current (Group D)(A) | 10 |

VDE Approval

| Rated voltage (V) | 800 |
|-------------------|-----|
| Rated current (A) | 18 |

Drawings

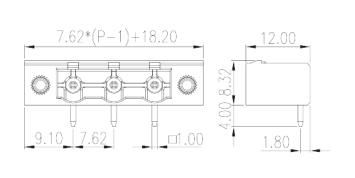

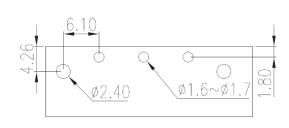

Approvals







