


0401-0152

非网管型POE 以太网交换机

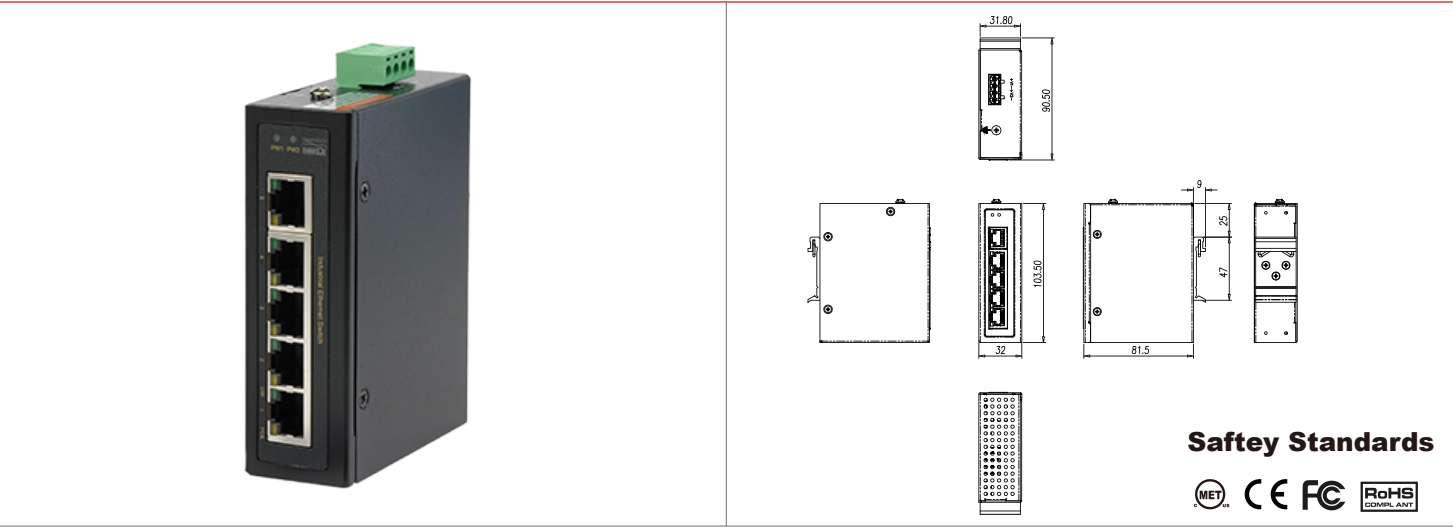

规格说明

连接介面	5xRJ-45 10/100/1000BaseT(X) auto negotiation, Auto MDI/MDI-X function, Full/Half duplex
外接电源供应	Redundant Dual DC 48V-56V Power Input
以太网路供电	PoE power per port 30watts. Maximum total power 120Watts with 56VDC input, Supports IEEE 802.3af/at
功耗	2.24W@48 VDC full load without PoE
插拔式接线端子	Provide 2 Redundant power, 4 Pin Wire range: 0.34mm ² to 2.5mm ² Solid wire (AWG):12-28 Stranded wire (AWG): 12-30 Torque:5lb-In/0.5Nm Wire Strip length: 7-8mm
工作温度	-40°C to +75°C
工作湿度	5% to 95% (Non-condensing)
壳体	Rugged Metal, IP30 Protection


规格说明

长x 宽x 高(mm)	103.5 x 32 x 81.5 mm
安装方式	DIN Rail and Wall Mount options included

认证

安全认证	UL60950-1(MET) LVD62368-1
EMC	CE, FCC, EN 55032/35
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 6KV; Air: 8KV IEC 61000-4-4 EFT: Power: 2KV; Signal: 2KV IEC 61000-4-5 Surge: Power: 2KV; Signal: 2KV

LED indicator

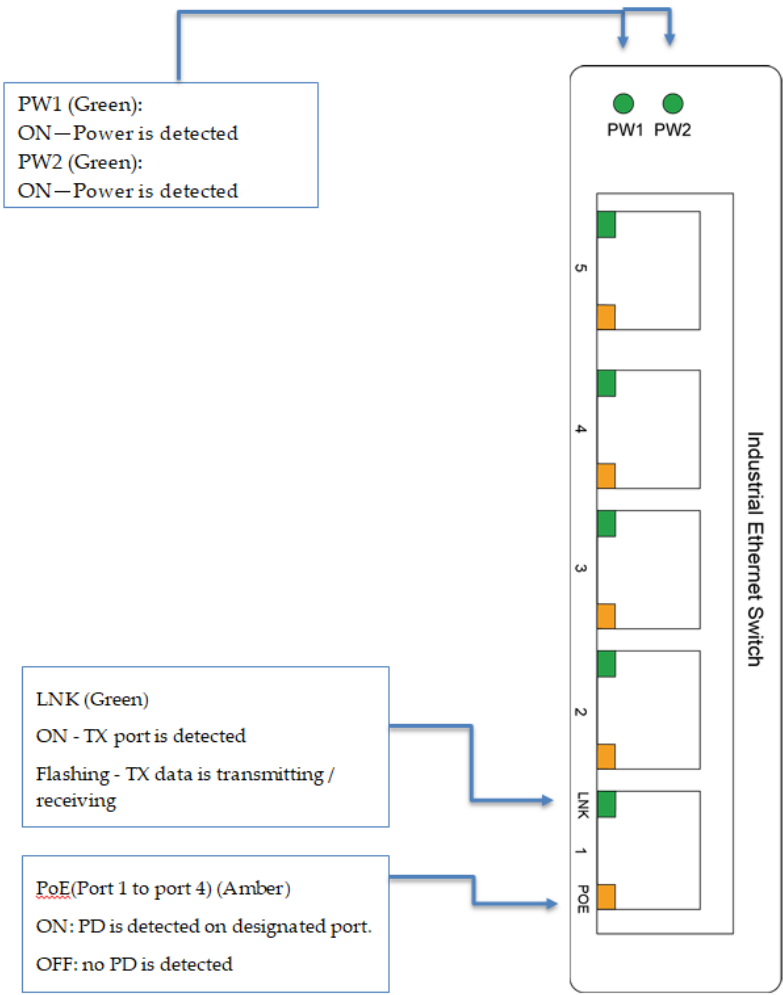

图面

L X W X H : 103.5 x 32 x 81.5

