


0401-0254

非网管型POE 以太网交换机



Safety Standards

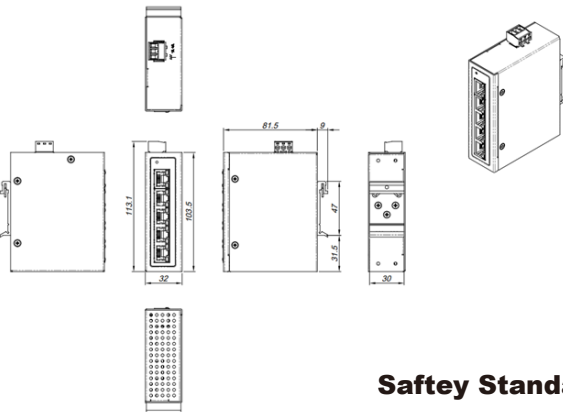

规格说明

连接介面	5 x RJ-45 10/100/1000BaseT(X) auto negotiation, 4 x 10/100/1000M PSE port, 1 x 10/100/1000M TX port Auto MDI/MDI-X function, Full/Half duplex
外接电源供应	DC 24V-56V Power Input
乙太网路供电	PoE power per port 30Watts Maximum total power 90Watts at 24VDC power input
功耗	3.9 W@48 VDC full load without PoE
插拔式接线端子	3 Pin Terminal block Wire range: 1.5mm ² Solid wire (AWG):14-28 Stranded wire(AWG): 14-28 Torque:0.2~2.5N-m Wire Strip length: 6-7mm
工作温度	-40°C to +75°C
工作湿度	5% to 95% (Non-condensing)
壳体	Rugged Metal, IP30 Protection

规格说明

长x 宽x 高(mm)	103.5 x 32 x 81.5 mm
安装方式	DIN Rail and Wall Mount options included

认证

安全认证	UL60950-1(MET) LVD62368-1
EMC	CE, FCC, EN 55032/35
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 6KV; Air: 8KV IEC 61000-4-4 EFT: Power: 2KV; Signal: 2KV IEC 61000-4-5 Surge: Power: 2KV; Signal:2KV

图面

L X W X H : 103.5 x 32 x 81.5

