


# 0225-0509

壳体配件

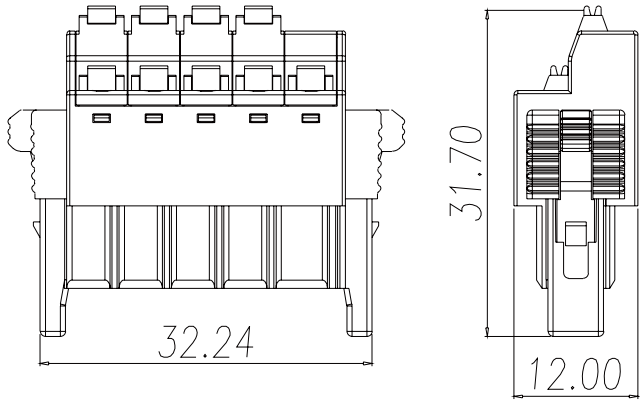

## 规格说明

通道数	9
额定电压	150V
额定电流	8A
耐电压(UL/IEC) Max.	1600V
适用环境温度	-40℃~+105℃