
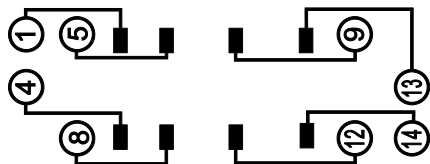
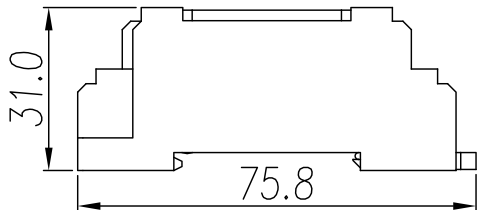
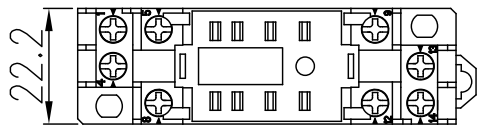


0149-6C01

Relay Socket

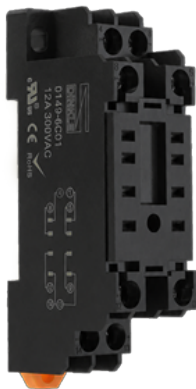

Specification

Rated Voltage	300VAC
Rated Current	12A
Between Coil and Contacts	2000V/S
Between Contacts	2000V/S
External Connection Wire	20-16AWG/0.5-1.5mm ²
Screw Torque	0.7N•m
External Terminal Protection	IP20
Ambient Temperature	-40~+85℃
Accessories	
Metal Retaining Clip	0149-6A03
Din Rail	TS-35