


0241-C3XX

Electronics & Interface > Signal Interface Modules

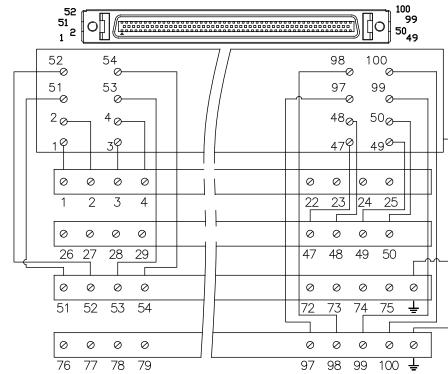

The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design.
The final product is made according to engineering drawing.

Specification

Specification		
Connection method		PID
Rated voltage		24 VDC
Rated current		1 A
Wire range		26~16 AWG
Stripping length		9~10 mm
Applicable ferrules		DN00510D DN00710D
Input type		NPN / PNP
Connector		MDR
Indicator		NO
Wire harness	Shielded	WHS55
	Unshielded	WHN55

Specification		
Part Number	Number of Connections	L x W x H (mm)
0241-C350	50 poles	60.2 x 77.9 x 30.3
0241-C368	68 poles	94.2 x 77.9 x 30.3
0241-C300	100 poles	112.2 x 77.9 x 30.3



Approvals

☒ **RoHS** ☒ **CE**