


# 0241-C440LEDA

Electronics & Interface > Signal Interface Modules

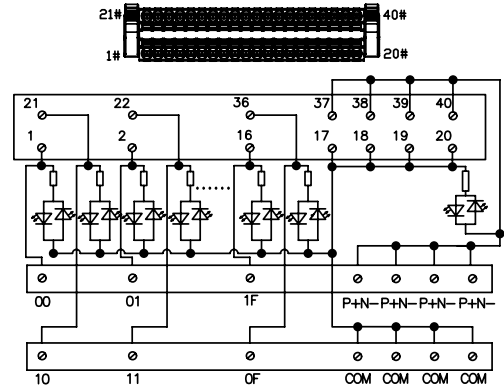

The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design.  
The final product is made according to engineering drawing.

## Specification

Specification		
Number of connections		40 Poles
Connection method		PID
Rated voltage		24 VDC
Rated current		1 A
Wire range		26~16 AWG
Stripping length		8~9 mm
Applicable ferrules		DN00510D DN00710D
Input type		NPN / PNP
Connector		Terminal blocks
Indicator		Yes
L x W x H (mm)		76 x 47.9 x 49.4
Wire harness	Shielded	WHSX7 / WHSX3
	Unshielded	WHNX7 / WHNX3



## Approvals

---

☒ **RoHS** ☒ **CE**