


0401-0152

Unmanaged PoE Ethernet Switch



Safety Standards

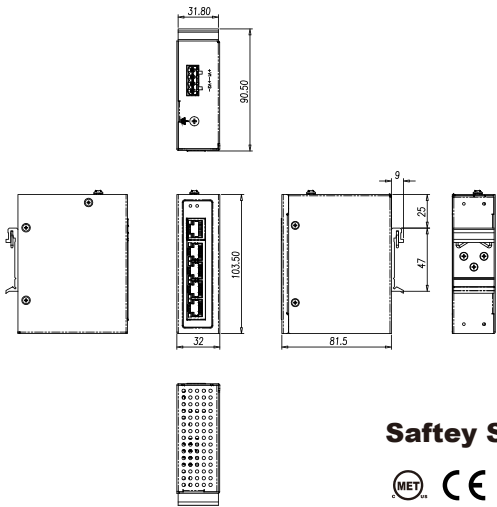

Specification

Network Connector	5xRJ-45 10/100/1000BaseT(X) auto negotiation, Auto MDI/MDI-X function, Full/Half duplex
External Power Supply	Redundant Dual DC 48V-56V Power Input
PoE power	PoE power per port 30watts. Maximum total power 120Watts with 56VDC input, Supports IEEE 802.3af/at
Power Consumption	2.24W@48 VDC full load without PoE
Removable Terminal Block	Provide 2 Redundant power, 4 Pin Wire range: 0.34mm ² to 2.5mm ² Solid wire (AWG):12-28 Stranded wire (AWG): 12-30 Torque:5lb-In/0.5Nm Wire Strip length: 7-8mm
Operating Temperature	-40°C to +75°C
Operating Humidity	5% to 95% (Non-condensing)
Housing	Rugged Metal, IP30 Protection


Specification

L x W x H (mm)	103.5 x 32 x 81.5 mm
Installation	DIN Rail and Wall Mount options included

Certified

Safety	UL60950-1(MET) LVD62368-1
EMC	CE, FCC, EN 55032/35
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 6KV; Air: 8KV IEC 61000-4-4 EFT: Power: 2KV; Signal: 2KV IEC 61000-4-5 Surge: Power: 2KV; Signal: 2KV

LED indicator

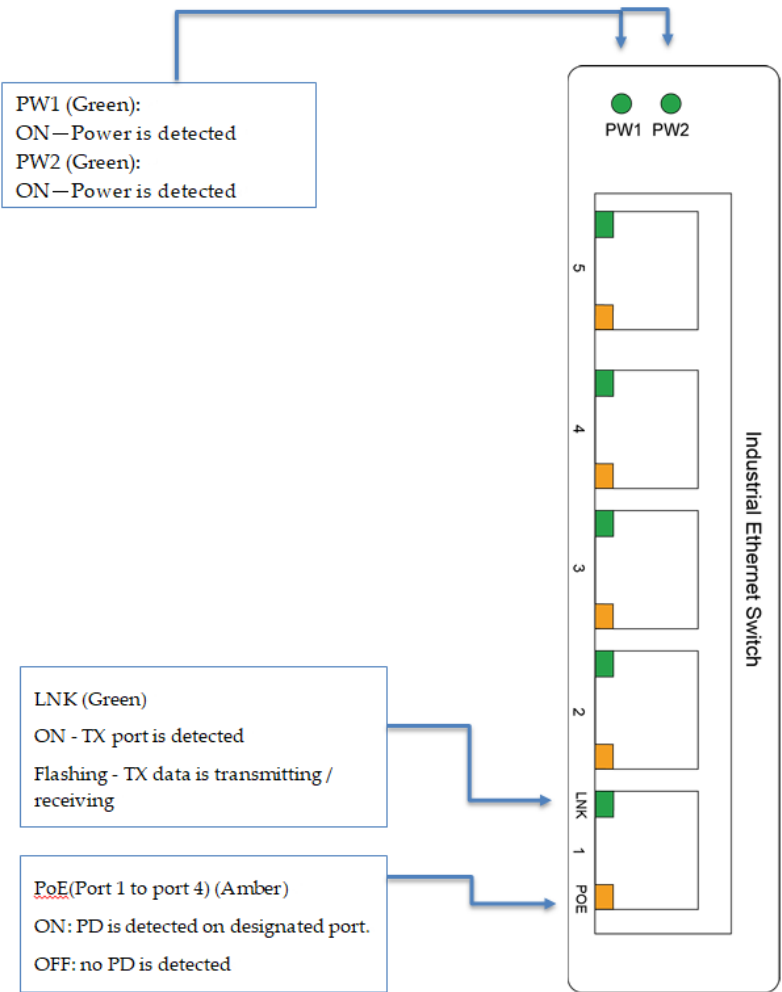

Dimensions

L X W X H : 103.5 x 32 x 81.5

