


# 0401-0254

## Unmanaged PoE Ethernet Switch



### Safety Standards

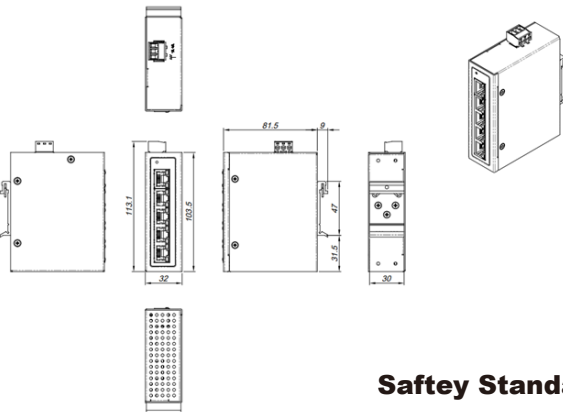

### Specification

|                          |                                                                                                                                                                |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Network Connector        | 5 x RJ-45 10/100/1000BaseT(X)<br>auto negotiation,<br>4 x 10/100/1000M PSE port,<br>1 x 10/100/1000M TX port<br>Auto MDI/MDI-X function,<br>Full/Half duplex   |
| External Power Supply    | DC 24V-56V Power Input                                                                                                                                         |
| PoE power                | PoE power per port 30Watts<br>Maximum total power 90Watts at<br>24VDC power input                                                                              |
| Power Consumption        | 3.9 W@48 VDC full load without PoE                                                                                                                             |
| Removable Terminal Block | 3 Pin Terminal block<br>Wire range: 1.5mm <sup>2</sup><br>Solid wire (AWG):14-28<br>Stranded wire(AWG): 14-28<br>Torque:0.2~2.5N-m<br>Wire Strip length: 6-7mm |
| Operating Temperature    | -40°C to +75°C                                                                                                                                                 |
| Operating Humidity       | 5% to 95% (Non-condensing)                                                                                                                                     |
| Housing                  | Rugged Metal, IP30 Protection                                                                                                                                  |

## Specification

|                |                                          |
|----------------|------------------------------------------|
| L x W x H (mm) | 103.5 x 32 x 81.5 mm                     |
| Installation   | DIN Rail and Wall Mount options included |

## Certified

|        |                                                                                                                                        |
|--------|----------------------------------------------------------------------------------------------------------------------------------------|
| Safety | UL60950-1(MET)<br>LVD62368-1                                                                                                           |
| EMC    | CE, FCC, EN 55032/35                                                                                                                   |
| EMI    | CISPR 32, FCC Part 15B Class A                                                                                                         |
| EMS    | IEC 61000-4-2 ESD: Contact: 6KV; Air: 8KV<br>IEC 61000-4-4 EFT: Power: 2KV; Signal: 2KV<br>IEC 61000-4-5 Surge: Power: 2KV; Signal:2KV |

## Dimensions

L X W X H : 103.5 x 32 x 81.5

