


EK500V2R-XXP

PCB Terminal Blocks > PCB Terminal Blocks

Date:2025-12-03Version:V1



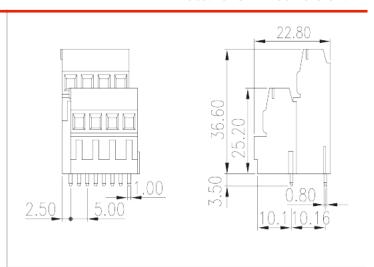

The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design.

The final product is made according to engineering drawing.

Product Description

Pitch: 5.00mm, 300V, 20A

General information

Short description	PCB Terminal Blocks, Screw Connection
Category	PCB Terminal Blocks
Pitch (mm)	5
Color	Green (default)
Connection method	Screw Connection
Type of locking	Without
Pin demensions (Thickness x Width)(mm)	0.8x1.0
PCB hole diameter (mm)	1.6
Level	Double level

Material information


Insulation material	PA
Insulation material group	I
Flame retardant rating , compliant with UL94	VO
Insulation resistance	□500MΩ at DC 500V
Conductor material	COPPER ALLOY

Plating of conductor surface	Tin PLATED	
Connection data-IEC		
Rated voltage (V)	250	
Rated current (A)	24	
Rated voltage (II/2)(V)	630	
Rated voltage (III/2) (V)	320	
Rated voltage (III/3)(V)	250	
Rated impulse voltage (II/2)(KV)	4	
Rated impulse voltage (III/2)(KV)	4	
Rated impulse voltage (III/3)(KV)	4	
Conductor cross section solid. min (mm²)	0.14	
Conductor cross section solid.max (mm²)	2.5	
Conductor cross section stranded. min (mm²)	0.14	
Conductor cross section stranded. max (mm²)	2.5	
Conductor cross section flexible, with min ferrule without plastic sleeve (mm²)	0.25	
Conductor cross section flexible, with max ferrule without plastic sleeve (mm²)	1.5	
Conductor cross section flexible, with min ferrule with plastic sleeve (mm²)	0.25	
Conductor cross section flexible, with max ferrule with plastic sleeve (mm²)	1.5	
2 conductors with same cross section, solid, max (mm²)	1	
2 conductors with same cross section, stranded, max (mm²)	0.75	
Screw thread	M2.5	
Rated torque (N.m)	0.5	
Stripping Length (mm)	6~7	
Connection data-UL		
Rated voltage (UL/CUL Group B)(V)	300	
Rated current (UL/CUL Group B)(A)	20	
Rated voltage (UL/CUL Group D)(V)	300	
Rated current (UL/CUL Group D)(A)	20	
Min. solid wire connection (AWG) acc. to UL/CUL	24	
Max. solid wire connection AWG acc. to UL/CUL	12	



Min. stranded wire connection AWG acc. to UL/CUL	24
Max. stranded wire connection AWG acc. to UL/CUL	12
Environment & Safety	
Finger protection (YES or NO)	YES
Operating temperature. max (°C)	120
Operating temperature. min (°C)	-40
UL Recognized	
Wire Range (Group B)(AWG)	24~12
Rated voltage (Group B)(V)	300
Rated current (Group B)(A)	20
Wire Range (Group D)(AWG)	24~12
Rated voltage (Group D)(V)	300
Rated current (Group D)(A)	20
CUL Recognized	
Wire Range (Group B)(AWG)	24~12
Rated voltage (Group B)(V)	300
Rated current (Group B)(A)	20
Wire Ranget (Group D)(AWG)	24~12
Rated voltage (Group D)(V)	300
Rated current (Group D)(A)	20

Drawings

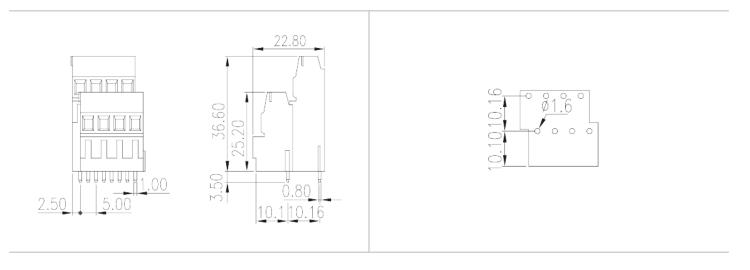



Approvals





