# DKZ4E-YG

DIN Rail Terminal Blocks > Busbar Terminal Blocks

Date:2026-11-18Version:1.1

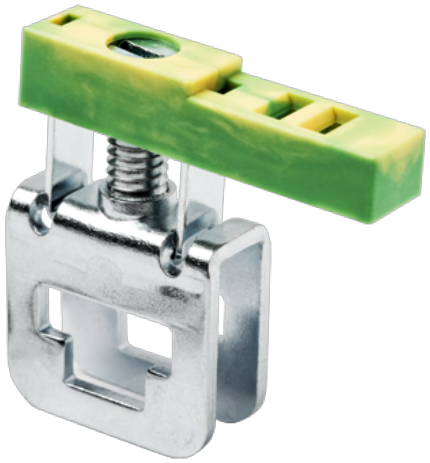

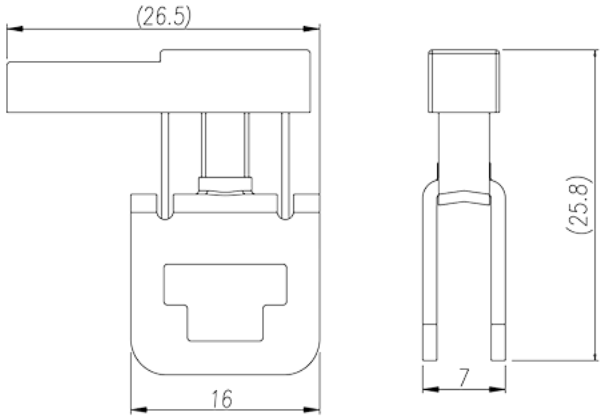


The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design.
The final product is made according to engineering drawing.

## Product Description

M4, Steel

## General information

| | |
|---|---|
| Short description | DIN Rail terminal blocks, Busbar terminal blocks |
| Color | Green-Yellow (default) |
| Connection method | Screw connection |
| Type of locking | Busbar mounting |
| Connection points | 1 |

## Material information

| | |
|---|---|
| Insulation material | PA |
| Insulation material group | I |
| Flame retardant rating , compliant with UL94 | V2 |

## Connection data-IEC

| | |
|---|---|
| Conductor cross section solid. min (mm²) | 0.5 |
| Conductor cross section solid.max (mm²) | 6 |
| Conductor cross section stranded. min (mm²) | 0.5 |
| Conductor cross section stranded. max (mm²) | 6 |


© DINKLE ENTERPRISE CO ,LTD. ALL RIGHT RESERVED

| | |
|---|---|
| Screw thread | M4 |
| Slotted screwdriver size (Blade thickness x Width)(mm) | 1.0x5.5 |
| Philips screwdriver size | PH2 |
| Recommend tightening torque. min (N.m) | 1.2 |
| Recommend tightening torque. max (N.m) | 2.4 |
| End cover plate required | NO |
| Grounding connections | NO |

## Connection data-UL

| | |
|---|---|
| Min. solid wire connection (AWG) acc. to UL/CUL | 20 |
| Max. solid wire connection AWG acc. to UL/CUL | 10 |
| Min. stranded wire connection AWG acc. to UL/CUL | 20 |
| Max. stranded wire connection AWG acc. to UL/CUL | 10 |

## Environment & Safety

| | |
|---|---|
| Back of the hand protection (YES or NO) | NO |
| Finger protection (YES or NO) | NO |

## Drawings

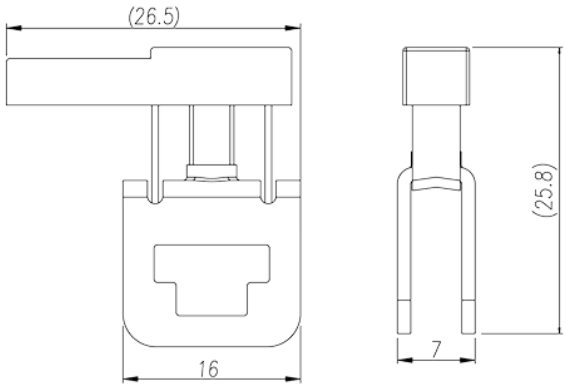


## Approvals


© DINKLE ENTERPRISE CO ,LTD. ALL RIGHT RESERVED

© DINKLE ENTERPRISE CO ,LTD. ALL RIGHT RESERVED