


# EC762HVM-XXP

PCB Terminal Blocks &gt; PCB Connector-Plug

Date:2026-02-18 Version:1.1

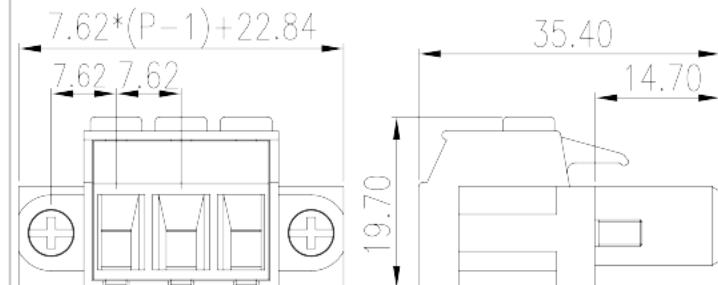

The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design.  
The final product is made according to engineering drawing.

## Product Description

Pitch : 7.62 mm, 600V, 41A

## General information

|                     |  |
|---------------------|--|
| Short description   | PCB Connector - Plug, Screw Connection |
| Category            | PCB Connector - Plug                   |
| Pitch (mm)          | 7.62                                   |
| Color               | Green (default)                        |
| Connection method   | Screw Connection                       |
| Type of locking     | With screw flange                      |
| Length (mm)         | 7.62*(P-1)+7.6                         |
| Width (mm)          | 35.4                                   |
| Height (mm)         | 19.7                                   |
| Number of positions | 02P~12P                                |
| Level               | Single level                           |

## Material information

|  |    |
|--|----|
| Insulation material                          | PA |
| Insulation material group                    | I  |
| Flame retardant rating , compliant with UL94 | V0 |

|                              |                   |
|------------------------------|-------------------|
| Insulation resistance        | □500MΩ at DC 500V |
| Conductor material           | COPPER ALLOY      |
| Plating of conductor surface | Tin PLATED        |

## Connection data-IEC

|   |      |
|---|------|
| Rated voltage (V)   | 1000 |
| Rated current (A)   | 41   |
| Rated voltage (II/2)(V)   | 1000 |
| Rated voltage (III/2) (V)   | 1000 |
| Rated voltage (III/3)(V)  | 1000 |
| Rated impulse voltage (II/2)(KV)  | 6    |
| Rated impulse voltage (III/2)(KV)   | 8    |
| Rated impulse voltage (III/3)(KV)   | 8    |
| Conductor cross section solid. min (mm <sup>2</sup> )   | 0.2  |
| Conductor cross section solid.max (mm <sup>2</sup> )  | 6    |
| Conductor cross section stranded. min (mm <sup>2</sup> )  | 0.2  |
| Conductor cross section stranded. max (mm <sup>2</sup> )  | 6    |
| Conductor cross section flexible, with min ferrule without plastic sleeve (mm <sup>2</sup> )              | 0.25 |
| Conductor cross section flexible, with max ferrule without plastic sleeve (mm <sup>2</sup> )              | 4    |
| Conductor cross section flexible, with min ferrule with plastic sleeve (mm <sup>2</sup> )                 | 0.25 |
| Conductor cross section flexible, with max ferrule with plastic sleeve (mm <sup>2</sup> )                 | 4    |
| 2 conductors with same cross section, solid, min (mm <sup>2</sup> )                                       | 0.2  |
| 2 conductors with same cross section, solid, max (mm <sup>2</sup> )                                       | 2.5  |
| 2 conductors with same cross section, stranded, min (mm <sup>2</sup> )                                    | 0.2  |
| 2 conductors with same cross section, stranded, max (mm <sup>2</sup> )                                    | 2.5  |
| 2 conductors with same cross section flexible, with min ferrule without plastic sleeve (mm <sup>2</sup> ) | 0.5  |
| 2 conductors with same cross section flexible, with max ferrule without plastic sleeve (mm <sup>2</sup> ) | 1.5  |
| 2 conductors with same cross section flexible, min twin ferrules with plastic sleeve (mm <sup>2</sup> )   | 0.5  |
| 2 conductors with same cross section flexible, max twin ferrules with plastic sleeve (mm <sup>2</sup> )   | 1.5  |

|  |         |
|--|---------|
| Screw thread   | M3      |
| Slotted screwdriver size (Blade thickness x Width)(mm) | 0.8x4.0 |
| Philips screwdriver size                               | PH2     |
| Rated torque (N.m)                                     | 0.7     |
| Stripping Length (mm)                                  | 7~8     |

## Connection data-UL

|  |     |
|--|-----|
| Rated voltage (UL/CUL Group B)(V)                | 600 |
| Rated current (UL/CUL Group B)(A)                | 41  |
| Rated voltage (UL/CUL Group C)(V)                | 600 |
| Rated current (UL/CUL Group C)(A)                | 41  |
| Rated voltage (UL/CUL Group D)(V)                | 600 |
| Rated current (UL/CUL Group D)(A)                | 41  |
| Min. solid wire connection (AWG) acc. to UL/CUL  | 30  |
| Max. solid wire connection AWG acc. to UL/CUL    | 8   |
| Min. stranded wire connection AWG acc. to UL/CUL | 30  |
| Max. stranded wire connection AWG acc. to UL/CUL | 8   |

## Environment & Safety

|                                 |     |
|---------------------------------|-----|
| Finger protection (YES or NO)   | YES |
| Operating temperature. max (°C) | 120 |
| Operating temperature. min (°C) | -40 |

## UL Recognized

|                            |      |
|----------------------------|------|
| Wire Range (Group B)(AWG)  | 30~8 |
| Rated voltage (Group B)(V) | 600  |
| Rated current (Group B)(A) | 41   |
| Wire Range (Group C)(AWG)  | 30~8 |
| Rated voltage (Group C)(V) | 600  |
| Rated current (Group C)(A) | 41   |
| Wire Range (Group D)(AWG)  | 30~8 |
| Rated voltage (Group D)(V) | 600  |
| Rated current (Group D)(A) | 5    |


## CUL Recognized

|                            |      |
|----------------------------|------|
| Wire Range (Group B)(AWG)  | 30~8 |
| Rated voltage (Group B)(V) | 600  |
| Rated current (Group B)(A) | 41   |
| Wire Range (Group C)(AWG)  | 30~8 |
| Rated voltage (Group C)(V) | 600  |
| Rated current (Group C)(A) | 41   |
| Wire Range (Group D)(AWG)  | 30~8 |
| Rated voltage (Group D)(V) | 600  |
| Rated current (Group D)(A) | 5    |

## VDE Approval

|                               |       |
|-------------------------------|-------|
| Wire Range (mm <sup>2</sup> ) | 0.2~6 |
| Rated voltage (V)             | 1000  |
| Rated current (A)             | 41    |

## Drawings

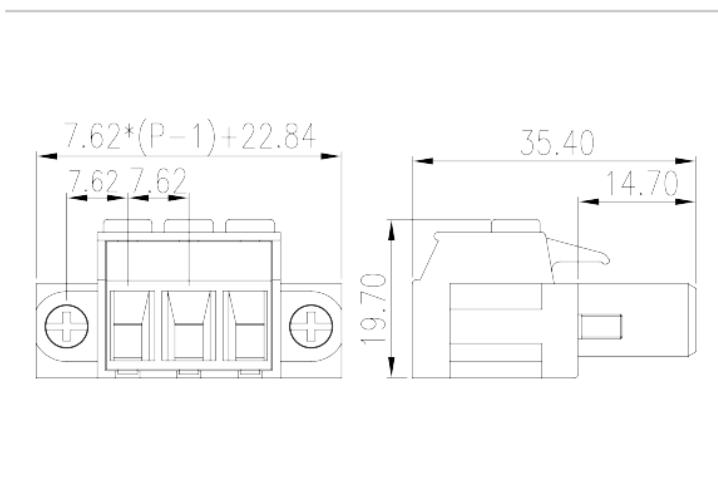

## Approvals

