



AK4-TN

DIN Rail Terminal Blocks > Spring Clamp Connection

Date:2025-10-24Version:1.1



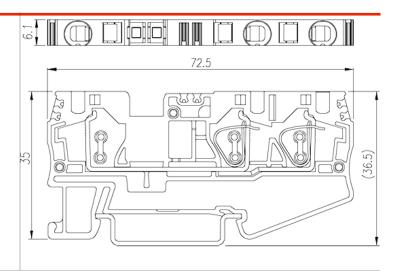

The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design.

The final product is made according to engineering drawing.

Product Description

600V, 25A, Beige (default)

General information

Short description	DIN Rail terminal blocks, Feed through terminal blocks
Category	Feed through terminal blocks
Color	Beige (default)
Connection method	Spring Clamp Connection
Type of locking	Rail Mounting
Length (mm)	72.5
Width (mm)	6.1
Height (mm)	35
Level	Single level
Connection points	3


Material information


Insulation material	PA
Insulation material group	I
Flame retardant rating , compliant with UL94	V0



Insulation resistance	≥500MΩ at DC 500V		
Connection data-IEC			
Rated voltage (V)	800		
Rated current (A)	32		
Rated voltage (III/3)(V)	800		
Rated impulse voltage (II/2)(KV)	8		
Rated impulse voltage (III/2)(KV)	8		
Rated impulse voltage (III/3)(KV)	8		
Conductor cross section solid. min (mm²)	0.2		
Conductor cross section solid.max (mm²)	6		
Conductor cross section stranded. min (mm²)	0.2		
Conductor cross section stranded. max (mm²)	4		
Conductor cross section flexible, with min ferrule without plastic sleeve (mm²)	0.25		
Conductor cross section flexible, with max ferrule without plastic sleeve (mm²)	4		
Conductor cross section flexible, with min ferrule with plastic sleeve (mm²)	0.25		
Conductor cross section flexible, with max ferrule with plastic sleeve (mm²)	4		
2 conductors with same cross section flexible, min twin ferrules with plastic sleeve (mm²)	0.5		
2 conductors with same cross section flexible, max twin ferrules with plastic sleeve (mm²)	1		
Slotted screwdriver size (Blade thickness x Width)(mm)	0.6x3.5		
Stripping Length (mm)	10		
Mounting rail	TS-35		
End cover plate required	YES		
Grounding connections	NO		
Connection data-UL			
Rated voltage (UL/CUL Group B)(V)	600		
Rated current (UL/CUL Group B)(A)	25		
Rated voltage (UL/CUL Group C)(V)	600		
Rated current (UL/CUL Group C)(A)	25		
Min. solid wire connection (AWG) acc. to UL/CUL	28		
Max. solid wire connection AWG acc. to UL/CUL	10		

YES YES 120 -40 28~10 600 25 28~10 600 25
YES 120 -40 28~10 600 25 28~10 600
YES 120 -40 28~10 600 25 28~10 600
120 -40 28~10 600 25 28~10 600
-40 28~10 600 25 28~10 600
28~10 600 25 28~10 600
600 25 28~10 600
600 25 28~10 600
25 28~10 600
28~10 600
600
25
28~10
600
25
28~10
600
25
0.2~4
800
32

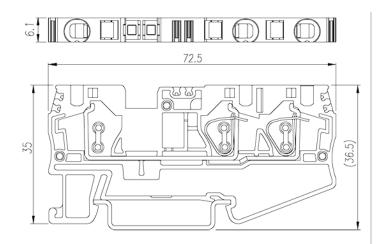



Approvals







