



AKK2.5-PE

DIN Rail Terminal Blocks > Spring Clamp Connection

Date:2025-10-24Version:1.1



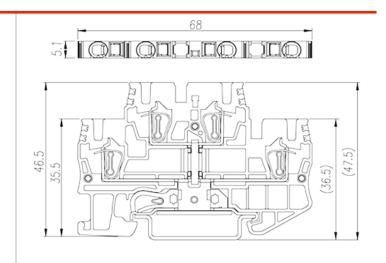

The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design.

The final product is made according to engineering drawing.

Product Description

Green-Yellow (default)

General information

Short description	DIN Rail terminal blocks, Grounding terminal blocks
Category	Grounding terminal blocks
Color	Green-Yellow (default)
Connection method	Spring Clamp Connection
Type of locking	Rail Mounting
Length (mm)	68
Width (mm)	5.1
Height (mm)	46.5
Level	Double level
Connection points	4

Material information

Insulation material	PA
Insulation material group	I
Flame retardant rating , compliant with UL94	V0



Insulation resistance	≥500MΩ at DC 500V	
Connection data-IEC		
Rated voltage (V)	630	
Rated voltage (III/3)(V)	630	
Rated impulse voltage (II/2)(KV)	8	
Rated impulse voltage (III/2)(KV)	8	
Rated impulse voltage (III/3)(KV)	8	
Conductor cross section solid. min (mm²)	0.2	
Conductor cross section solid.max (mm²)	2.5	
Conductor cross section stranded. min (mm²)	0.2	
Conductor cross section stranded. max (mm²)	2.5	
Conductor cross section flexible, with min ferrule without plastic sleeve (mm²)	0.25	
Conductor cross section flexible, with max ferrule without plastic sleeve (mm²)	2.5	
Conductor cross section flexible, with min ferrule with plastic sleeve (mm²)	0.25	
Conductor cross section flexible, with max ferrule with plastic sleeve (mm²)	2.5	
2 conductors with same cross section flexible, min twin ferrules with plastic sleeve (mm²)	0.5	
2 conductors with same cross section flexible, max twin ferrules with plastic sleeve (mm²)	0.5	
Slotted screwdriver size (Blade thickness x Width)(mm)	0.6x3.5	
Stripping Length (mm)	10	
Mounting rail	TS-35	
End cover plate required	YES	
Grounding connections	YES	
Connection data-UL		
Rated voltage (UL/CUL Group B)(V)	300	
Rated voltage (UL/CUL Group C)(V)	300	
Min. solid wire connection (AWG) acc. to UL/CUL	30	
Max. solid wire connection AWG acc. to UL/CUL	12	
Min. stranded wire connection AWG acc. to UL/CUL	30	
Max. stranded wire connection AWG acc. to UL/CUL	12	

Environment & Safety

Back of the hand protection (YES or NO)	YES
Finger protection (YES or NO)	YES
Operating temperature. max (°C)	120
Operating temperature. min (°C)	-40

UL Recognized

Wire Range (Group B)(AWG)	30~12
Rated voltage (Group B)(V)	300
Wire Range (Group C)(AWG)	30~12
Rated voltage (Group C)(V)	300


CUL Recognized


Wire Range (Group B)(AWG)	30~12
Rated voltage (Group B)(V)	300
Wire Range (Group C)(AWG)	30~12
Rated voltage (Group C)(V)	300

VDE Approval

Wire Range (mm²)	0.2~2.5
Rated voltage (V)	630

Drawings

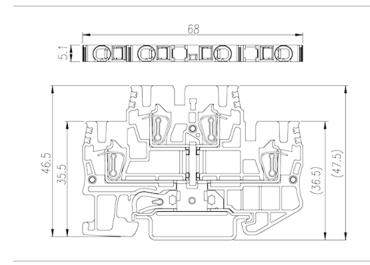



circuit diagram



Approvals







