


0225-17XX

PCB Terminal Blocks > PCB Connector-Socket

Date:2025-10-29Version:1.2



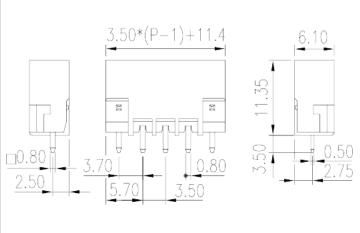

The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design.

The final product is made according to engineering drawing.

Product Description

Pitch: 3.50 mm, 300V, 8A


General information


Cl ut -l uiu-ti - u	DCD Commonton Control Marin and Indian
Short description	PCB Connector–Socket, Wave soldering
Category	PCB Connector–Socket
Pitch (mm)	3.50
Color	Black (default)
Type of locking	With threaded flange
Soldering method	Wave soldering
Length (mm)	3.50*(P-1)+11.4
Width (mm)	6.1
Height (mm)	11.35
Pin demensions (Thickness x Width)(mm)	0.5x0.8
PCB hole diameter (mm)	1.2
Number of positions	02P~24P
Level	Single level

Material information

Insulation material	PA
---------------------	----

VO
□500MΩ at DC 500V
COPPER ALLOY
Tin PLATED
630
15
630
320
250
4
4
4
0.1
300
8
300
8
YES
120
-40

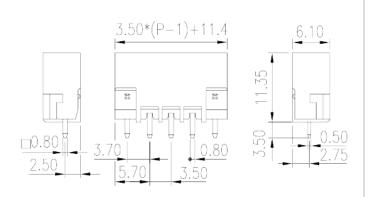



Approvals



