


# 0171-20XX

PCB Terminal Blocks &gt; PCB Terminal Blocks

Date:2026-02-02 Version:V1

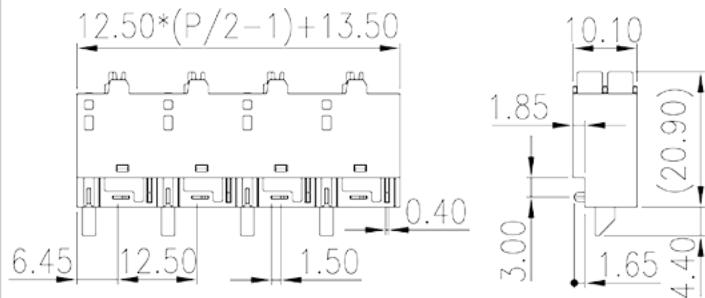

The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design.  
The final product is made according to engineering drawing.

## Product Description

Pitch : 12.50mm, 300V, 15A

## General information

|  |                                     |
|--|-------------------------------------|
| Short description                      | PCB Terminal Blocks, Push-in Design |
| Category                               | PCB Terminal Blocks                 |
| Pitch (mm)                             | 12.50                               |
| Color                                  | Black (default)                     |
| Connection method                      | Push in design                      |
| Type of locking                        | Without                             |
| Soldering method                       | Wave soldering                      |
| Length (mm)                            | 12.50*(P/2-1)+13.5                  |
| Width (mm)                             | 25.3                                |
| Height (mm)                            | 10.1                                |
| Pin demensions (Thickness x Width)(mm) | 0.4x1.5                             |
| PCB hole diameter (mm)                 | 0.7x2.0                             |
| Number of positions                    | 02P~08P                             |
| Level                                  | Double level                        |

## Material information

|  |                   |
|--|-------------------|
| Insulation material                          | PA                |
| Insulation material group                    | I                 |
| Flame retardant rating , compliant with UL94 | V0                |
| Insulation resistance                        | □500MΩ at DC 500V |
| Conductor material                           | COPPER ALLOY      |
| Plating of conductor surface                 | Tin PLATED        |

### Connection data-IEC

|  |         |
|--|---------|
| Rated voltage (V)  | 320     |
| Rated current (A)  | 20      |
| Rated voltage (II/2)(V)  | 630     |
| Rated voltage (III/2) (V)  | 320     |
| Rated voltage (III/3)(V)   | 250     |
| Rated impulse voltage (II/2)(KV)   | 4       |
| Rated impulse voltage (III/2)(KV)  | 4       |
| Rated impulse voltage (III/3)(KV)  | 4       |
| Conductor cross section solid. min (mm <sup>2</sup> )  | 0.2     |
| Conductor cross section solid.max (mm <sup>2</sup> )   | 2.5     |
| Conductor cross section stranded. min (mm <sup>2</sup> )                                     | 0.2     |
| Conductor cross section stranded. max (mm <sup>2</sup> )                                     | 2.5     |
| Conductor cross section flexible, with min ferrule without plastic sleeve (mm <sup>2</sup> ) | 0.25    |
| Conductor cross section flexible, with max ferrule without plastic sleeve (mm <sup>2</sup> ) | 1.5     |
| Conductor cross section flexible, with min ferrule with plastic sleeve (mm <sup>2</sup> )    | 0.25    |
| Conductor cross section flexible, with max ferrule with plastic sleeve (mm <sup>2</sup> )    | 1.5     |
| Slotted screwdriver size (Blade thickness x Width)(mm)                                       | 0.4x2.5 |
| Stripping Length (mm)  | 9~10    |

### Connection data-UL


|   |     |
|---|-----|
| Rated voltage (UL/CUL Group B)(V)               | 300 |
| Rated current (UL/CUL Group B)(A)               | 15  |
| Rated voltage (UL/CUL Group D)(V)               | 300 |
| Rated current (UL/CUL Group D)(A)               | 10  |
| Min. solid wire connection (AWG) acc. to UL/CUL | 24  |

|  |    |
|--|----|
| Max. solid wire connection AWG acc. to UL/CUL    | 12 |
| Min. stranded wire connection AWG acc. to UL/CUL | 24 |
| Max. stranded wire connection AWG acc. to UL/CUL | 12 |

## Environment & Safety

|                                 |     |
|---------------------------------|-----|
| Finger protection (YES or NO)   | YES |
| Operating temperature, max (°C) | 120 |
| Operating temperature, min (°C) | -40 |

## Drawings

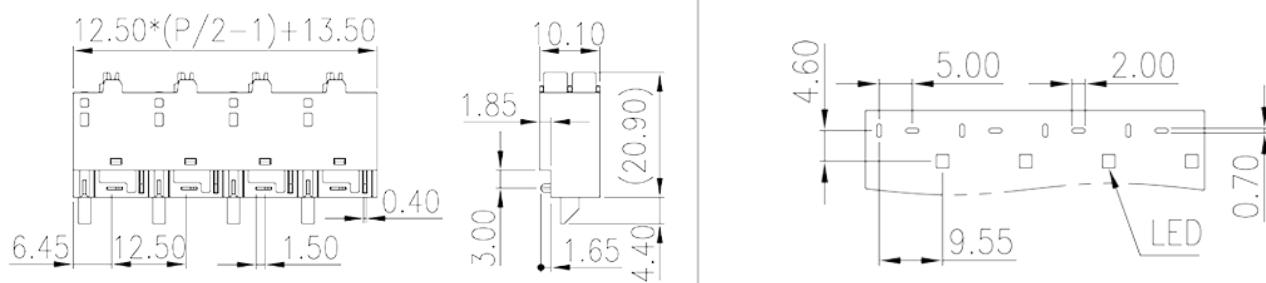

## Approvals

