


# DP2.5N-TR

DIN Rail Terminal Blocks > Push-in Design

Date:2025-11-06Version:1.1



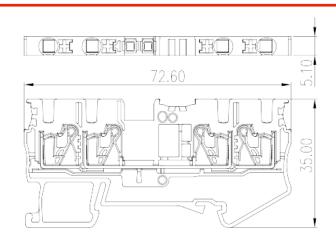

The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design.

The final product is made according to engineering drawing.

#### **Product Description**

600V, 20A, Beige (default)

#### General information

Short description	Single level Feed-Through Terminal Block, Push-in Design
Category	Single level Feed Through Terminal Block
Color	Beige (default)
Connection method	Push-in Design
Type of locking	Rail Mounting
Length (mm)	72.6
Width (mm)	5.1
Height (mm)	35
Number of positions	<u>≥</u> 1P
Level	Single level
Connection points	4
	·

#### Material information

Insulation material	PA
Insulation material group	I




Flame retardant rating , compliant with UL94	V0	
Insulation resistance	≥500MΩ at DC 500V	
Connection data-IEC		
Rated voltage (V)	800	
Rated current (A)	24	
Rated voltage (III/3)(V)	800	
Rated impulse voltage (III/3)(KV)	8	
Conductor cross section solid. min (mm²)	0.14	
Conductor cross section solid.max (mm²)	4	
Conductor cross section stranded. min (mm²)	0.14	
Conductor cross section stranded. max (mm²)	2.5	
Conductor cross section flexible, with min ferrule without plastic sleeve (mm²)	0.25	
Conductor cross section flexible, with max ferrule without plastic sleeve (mm²)	2.5	
Conductor cross section flexible, with min ferrule with plastic sleeve (mm²)	0.25	
Conductor cross section flexible, with max ferrule with plastic sleeve (mm²)	2.5	
2 conductors with same cross section flexible, min twin ferrules with plastic sleeve (mm²)	0.5	
2 conductors with same cross section flexible, max twin ferrules with plastic sleeve (mm²)	0.5	
Slotted screwdriver size (Blade thickness x Width)(mm)	0.6x3.5	
Stripping Length (mm)	10	
Mounting rail	TS-35 \ TS-35/15	
End cover plate required	YES	
Grounding connections	NO	
Connection data-UL		
Rated voltage (UL/CUL Group B)(V)	600	
Rated current (UL/CUL Group B)(A)	20	
Rated voltage (UL/CUL Group C)(V)	600	
Rated current (UL/CUL Group C)(A)	20	
Min. solid wire connection (AWG) acc. to UL/CUL	26	
Max. solid wire connection AWG acc. to UL/CUL	12	
Min. stranded wire connection AWG acc. to UL/CUL	26	



Max. stranded wire connection AWG acc. to UL/CUL	12	
Environment & Safety		
Back of the hand protection (YES or NO)	YES	
Finger protection (YES or NO)	YES	
Operating temperature. max (°C)	120	
Operating temperature. min (°C)	-40	
UL Recognized		
Wire Range (Group B)(AWG)	26~12	
Rated voltage (Group B)(V)	600	
Rated current (Group B)(A)	20	
Wire Range (Group C)(AWG)	26~12	
Rated voltage (Group C)(V)	600	
Rated current (Group C)(A)	20	
CUL Recognized		
Wire Range (Group B)(AWG)	26~12	
Rated voltage (Group B)(V)	600	
Rated current (Group B)(A)	20	
Wire Range (Group C)(AWG)	26~12	
Rated voltage (Group C)(V)	600	
Rated current (Group C)(A)	20	

## Drawings

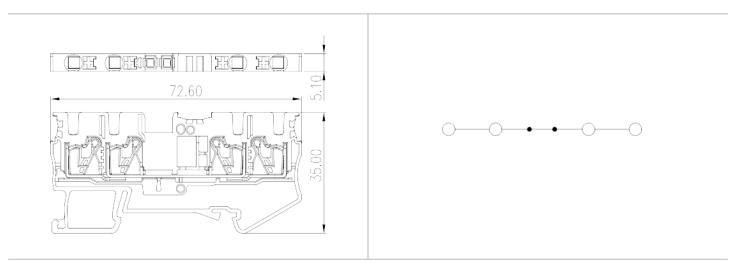



### Approvals







