
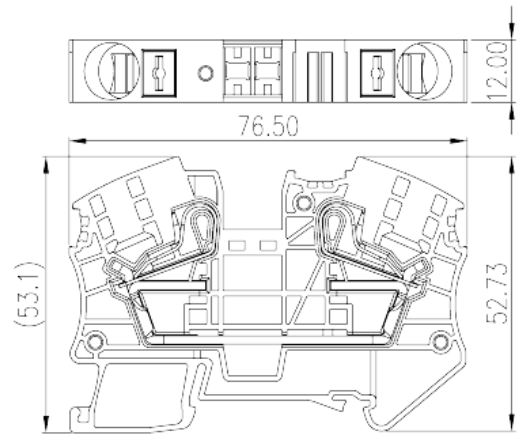


# DP16

DIN Rail Terminal Blocks &gt; Push-in Design

Date:2026-06-16Version:1.1

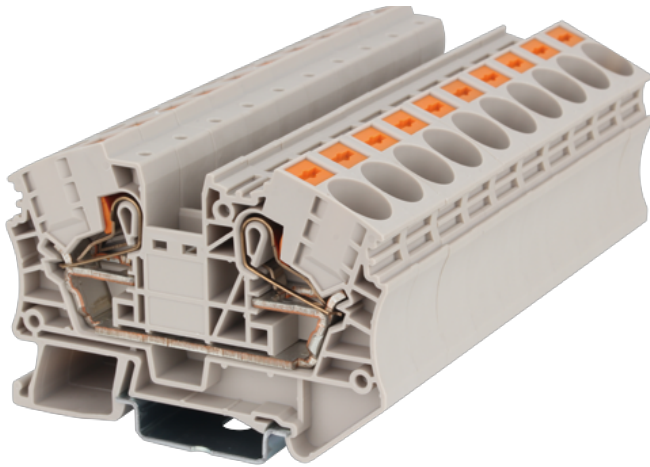

The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design. The final product is made according to engineering drawing.

## Product Description

600V, 82A, Beige (default)

## General information

|                     |  |
|---------------------|--|
| Short description   | Single level Feed-Through Terminal Block, Push-in Design |
| Category            | Single level Feed Through Terminal Block                 |
| Color               | Beige (default)  |
| Connection method   | Push-in Design   |
| Type of locking     | Rail Mounting  |
| Length (mm)         | 76.5   |
| Width (mm)          | 12   |
| Height (mm)         | 53.1   |
| Number of positions | ≥1P  |
| Level               | Single level   |
| Connection points   | 2  |

## Material information

|                           |    |
|---------------------------|----|
| Insulation material       | PA |
| Insulation material group | I  |

|  |                   |
|--|-------------------|
| Flame retardant rating , compliant with UL94 | V0                |
| Insulation resistance                        | ≥500MΩ at DC 500V |

## Connection data-IEC

|   |                |
|---|----------------|
| Rated voltage (V)   | 1000           |
| Rated current (A)   | 76             |
| Rated voltage (III/3)(V)  | 1000           |
| Rated impulse voltage (III/3)(KV)   | 8              |
| Conductor cross section solid. min (mm <sup>2</sup> )   | 0.5            |
| Conductor cross section solid.max (mm <sup>2</sup> )  | 25             |
| Conductor cross section stranded. min (mm <sup>2</sup> )  | 0.5            |
| Conductor cross section stranded. max (mm <sup>2</sup> )  | 16             |
| Conductor cross section flexible, with min ferrule without plastic sleeve (mm <sup>2</sup> )            | 0.5            |
| Conductor cross section flexible, with max ferrule without plastic sleeve (mm <sup>2</sup> )            | 16             |
| Conductor cross section flexible, with min ferrule with plastic sleeve (mm <sup>2</sup> )               | 0.5            |
| Conductor cross section flexible, with max ferrule with plastic sleeve (mm <sup>2</sup> )               | 16             |
| 2 conductors with same cross section flexible, min twin ferrules with plastic sleeve (mm <sup>2</sup> ) | 1.5            |
| 2 conductors with same cross section flexible, max twin ferrules with plastic sleeve (mm <sup>2</sup> ) | 4              |
| Slotted screwdriver size (Blade thickness x Width)(mm)  | 1.0x5.5        |
| Stripping Length (mm)   | 18             |
| Mounting rail   | TS-35、TS-35/15 |
| End cover plate required  | YES            |
| Grounding connections   | NO             |

## Connection data-UL

|  |     |
|--|-----|
| Rated voltage (UL/CUL Group B)(V)                | 600 |
| Rated current (UL/CUL Group B)(A)                | 82  |
| Rated voltage (UL/CUL Group C)(V)                | 600 |
| Rated current (UL/CUL Group C)(A)                | 82  |
| Min. solid wire connection (AWG) acc. to UL/CUL  | 20  |
| Max. solid wire connection AWG acc. to UL/CUL    | 4   |
| Min. stranded wire connection AWG acc. to UL/CUL | 20  |

Max. stranded wire connection AWG acc. to UL/CUL

4

## Environment & Safety

|   |     |
|---|-----|
| Back of the hand protection (YES or NO) | YES |
| Finger protection (YES or NO)           | YES |
| Operating temperature. max (°C)         | 120 |
| Operating temperature. min (°C)         | -40 |



## UL Recognized

|                            |      |
|----------------------------|------|
| Wire Range (Group B)(AWG)  | 20~4 |
| Rated voltage (Group B)(V) | 600  |
| Rated current (Group B)(A) | 82   |
| Wire Range (Group C)(AWG)  | 20~4 |
| Rated voltage (Group C)(V) | 600  |
| Rated current (Group C)(A) | 82   |

## CUL Recognized

|                            |      |
|----------------------------|------|
| Wire Range (Group B)(AWG)  | 20~4 |
| Rated voltage (Group B)(V) | 600  |
| Rated current (Group B)(A) | 82   |
| Wire Range (Group C)(AWG)  | 20~4 |
| Rated voltage (Group C)(V) | 600  |
| Rated current (Group C)(A) | 82   |

## Drawings

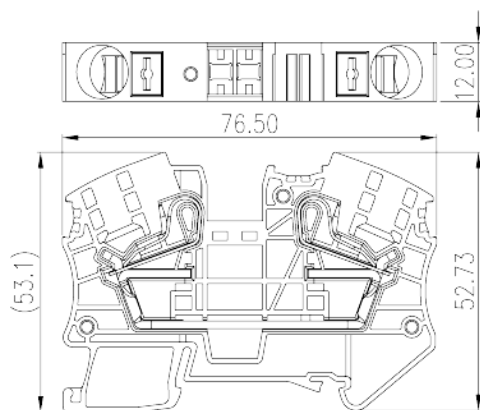

## Approvals

---

