


TKE04

PCB Terminal Blocks > Transformer Terminal Blocks

Date:2025-10-30Version:1.2

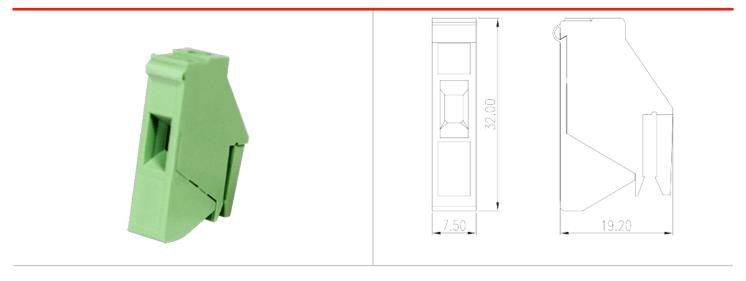

The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design.

The final product is made according to engineering drawing.

Product Description

Pitch: 7.50 mm, M3, 600V, 25sol/30str

General information

Short description	Transformer terminal blocks, Screw connection
Pitch (mm)	7.5
Color	Green (default)
Connection method	Screw connection
Type of locking	Without

Material information

Insulation material	PA
Insulation material group	I
Flame retardant rating , compliant with UL94	VO
Conductor material	COPPER ALLOY
Plating of conductor surface	Tin PLATED

Connection data-IEC

Rated voltage (V)	630
Rated current (A)	25/30

Rated voltage (III/3)(V)	630
Rated impulse voltage (II/2)(KV)	5
Rated impulse voltage (III/2)(KV)	5
Screw thread	M3
Slotted screwdriver size (Blade thickness x Width)(mm)	0.8x4.0
Philips screwdriver size	PH1
Rated torque (N.m)	0.53
Stripping Length (mm)	15~17
Connection data-UL	
Rated voltage (UL/CUL Group B)(V)	600
Rated current (UL/CUL Group B)(A)	25/30
Rated voltage (UL/CUL Group C)(V)	600
Rated current (UL/CUL Group C)(A)	25/30
Rated voltage (UL/CUL Group D)(V)	600
Rated current (UL/CUL Group D)(A)	5
Min. solid wire connection (AWG) acc. to UL/CUL	30
Max. solid wire connection AWG acc. to UL/CUL	10
Min. stranded wire connection AWG acc. to UL/CUL	30
Max. stranded wire connection AWG acc. to UL/CUL	10
Environment & Safety	
Back of the hand protection (YES or NO)	YES
Finger protection (YES or NO)	YES
Operating temperature. max (°C)	115
Operating temperature. min (°C)	-40
UL Recognized	
Wire Range (Group B)(AWG)	10~30
Rated voltage (Group B)(V)	600
Rated current (Group B)(A)	30
Wire Range (Group C)(AWG)	10~30
Rated voltage (Group C)(V)	600
Rated current (Group C)(A)	30
Wire Range (Group D)(AWG)	10~30



Rated voltage (Group D)(V)	600
Rated current (Group D)(A)	5


CUL Recognized

30 10~30 600
30
600
10~30
30
600
10~30

VDE Approval

Rated voltage (V)	630
Rated current (A)	25/30

Drawings



Approvals







