
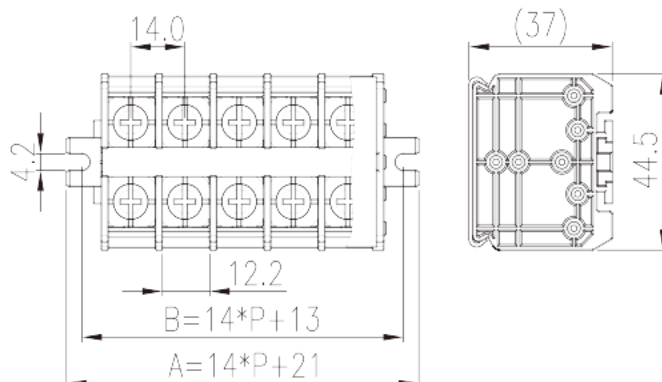


DKB60N-XXPCK

NEMA Terminal Blocks > Panel Mounting

Date:2025-04-30

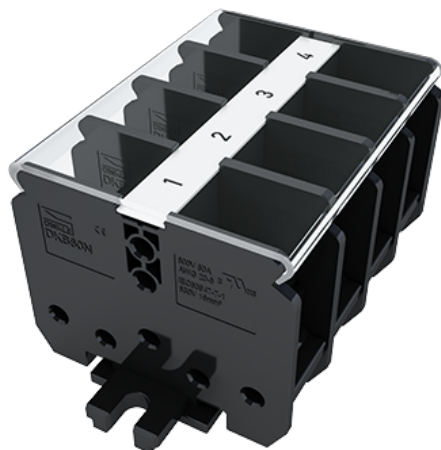

The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design.
The final product is made according to engineering drawing.

Product Description

Pitch : 14mm, M5, 600V, 60A

General information

Short description	Panel Mounting, Screw Connection
Category	Panel Mounting
Pitch (mm)	14
Color	Refer to drawing
Connection method	Screw Connection
Length (mm)	$14.00 \times P + 21$
Width (mm)	44.5
Height (mm)	Refer to drawing
Number of poles	01P~16P
Number of positions	01P~16P
Level	1
Connection points	2~32

Material information

Insulation material	PC
Insulation material group	IIIa

Flame retardant rating , compliant with UL94	V2
Insulation resistance	□1000MΩ at DC 500V
Conductor material	COPPER ALLOY
Plating of conductor surface	Tin PLATED

Connection data-IEC

Rated voltage (V)	630
Rated current (A)	57/76(with Fork Terminal)
Rated voltage (III/3)(V)	630
Rated impulse voltage (III/3)(KV)	8
Conductor cross section solid. min (mm²)	0.5
Conductor cross section solid.max (mm²)	10
Conductor cross section stranded. min (mm²)	0.5
Conductor cross section stranded. max (mm²)	10
2 conductors with same cross section, solid, max (mm²)	10
2 conductors with same cross section, stranded, max (mm²)	10
Screw thread	M5
Philips screwdriver size	PH2
Rated torque (N.m)	1.6~1.8
Recommend tightening torque. min (N.m)	1.6
Recommend tightening torque. max (N.m)	1.8
Tightening torque with flange. max (N.m)	0.8
Stripping Length (mm)	13~14The stripping length depends on the specification provided by the cablelug manufacturer
Mounting rail	TS-35N 、TS-35/15N
End cover plate required	YES
Grounding connections	NO

Connection data-UL

Rated voltage (UL/CUL Group B)(V)	600
Rated current (UL/CUL Group B)(A)	50A /60A(with Fork Terminal)
Rated voltage (UL/CUL Group C)(V)	600
Rated current (UL/CUL Group C)(A)	50A /60A(with Fork Terminal)
Rated voltage (UL/CUL Group D)(V)	600
Rated current (UL/CUL Group D)(A)	50A /60A(with Fork Terminal)

Min. solid wire connection (AWG) acc. to UL/CUL	20
Max. solid wire connection AWG acc. to UL/CUL	8
Min. stranded wire connection AWG acc. to UL/CUL	20
Max. stranded wire connection AWG acc. to UL/CUL	8

Environment & Safety

Back of the hand protection (YES or NO)	YES
Finger protection (YES or NO)	NO
Operating temperature. max (°C)	125
Operating temperature. min (°C)	-40


UL Recognized

Wire Range (Group B)(AWG)	20-8
Rated voltage (Group B)(V)	600
Rated current (Group B)(A)	50A /60A(with Fork Terminal)
Wire Range (Group C)(AWG)	20-8
Rated voltage (Group C)(V)	600
Rated current (Group C)(A)	50A /60A(with Fork Terminal)
Wire Range (Group D)(AWG)	20-8
Rated voltage (Group D)(V)	600
Rated current (Group D)(A)	50A /60A(with Fork Terminal)

CUL Recognized

Wire Range (Group B)(AWG)	20-8
Rated voltage (Group B)(V)	600
Rated current (Group B)(A)	50A /60A(with Fork Terminal)
Wire Range (Group C)(AWG)	20-8
Rated voltage (Group C)(V)	600
Rated current (Group C)(A)	50A /60A(with Fork Terminal)
Wire Range (Group D)(AWG)	20-8
Rated voltage (Group D)(V)	600
Rated current (Group D)(A)	50A /60A(with Fork Terminal)

Drawings

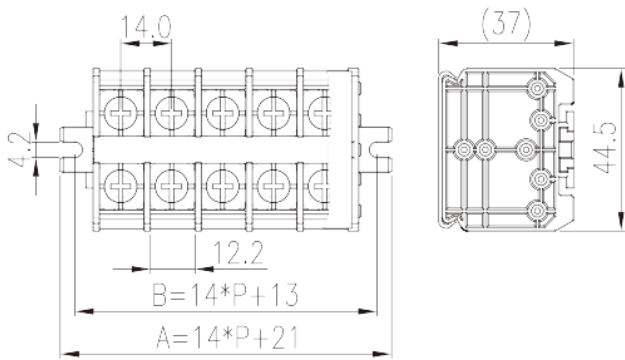

Approvals

