
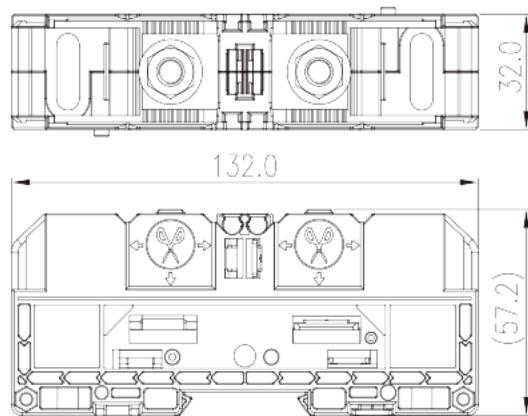


# DKM70

DIN Rail Terminal Blocks &gt; Stud Connection

Date:2026-01-14

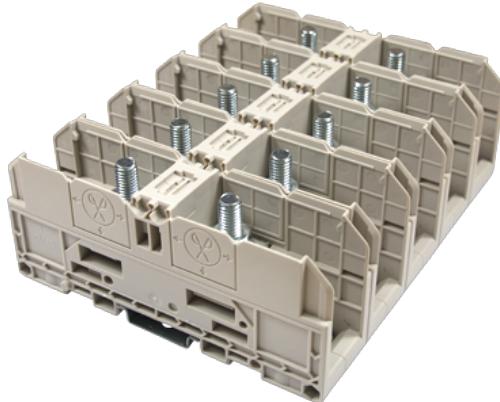

The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design.  
The final product is made according to engineering drawing.

## Product Description

M8, 1500V, 230A, Beige (default)

## General information

|                   |  |
|-------------------|--|
| Short description | Feed-through Single Level, Stud Connection |
| Category          | Feed-through Single Level                  |
| Pitch (mm)        | 32   |
| Color             | Refer to drawing                           |
| Connection method | Stud Connection                            |
| Length (mm)       | 132  |
| Width (mm)        | 32   |
| Height (mm)       | 57.2                                       |
| Level             | Single level                               |
| Connection points | 2  |

## Material information

|  |                   |
|--|-------------------|
| Insulation material                          | PA                |
| Insulation material group                    | I                 |
| Flame retardant rating , compliant with UL94 | V0                |
| Insulation resistance                        | □500MΩ at DC 500V |

## Connection data-IEC

|  |   |
|--|---|
| Rated voltage (V)  | 1500  |
| Rated current (A)  | 192   |
| Rated voltage (III/3)(V)                                 | 1500  |
| Rated impulse voltage (III/3)(KV)                        | 8   |
| Conductor cross section solid. min (mm <sup>2</sup> )    | 2.5   |
| Conductor cross section solid.max (mm <sup>2</sup> )     | 70  |
| Conductor cross section stranded. min (mm <sup>2</sup> ) | 2.5   |
| Conductor cross section stranded. max (mm <sup>2</sup> ) | 70  |
| Screw thread   | M8  |
| Philips screwdriver size                                 | 13X6.3  |
| Rated torque (N.m)                                       | 6~12  |
| Recommend tightening torque. min (N.m)                   | 6   |
| Recommend tightening torque. max (N.m)                   | 12  |
| Stripping Length (mm)                                    | The stripping length depends on the specification provided by the cablelug manufacturer |
| Mounting rail  | TS-35   |
| End cover plate required                                 | NO  |
| Grounding connections                                    | NO  |

## Connection data-UL

|  |  |
|--|--|
| Rated voltage (UL/CUL Group E)(V)                | 1500                                   |
| Rated current (UL/CUL Group E)(A)                | *Single Cable 175A / Double Cable 230A |
| Min. solid wire connection (AWG) acc. to UL/CUL  | 14~2/0                                 |
| Max. solid wire connection AWG acc. to UL/CUL    | 2/0                                    |
| Min. stranded wire connection AWG acc. to UL/CUL | 14                                     |
| Max. stranded wire connection AWG acc. to UL/CUL | 2/0                                    |

## Environment & Safety

|   |     |
|---|-----|
| Back of the hand protection (YES or NO) | NO  |
| Finger protection (YES or NO)           | NO  |
| Operating temperature. max (°C)         | 120 |
| Operating temperature. min (°C)         | -40 |


## UL Recognized

|                            |  |
|----------------------------|--|
| Wire Range (Group E)(AWG)  | 14~2/0                                 |
| Rated voltage (Group E)(V) | 1500                                   |
| Rated current (Group E)(A) | *Single Cable 175A / Double Cable 230A |

## CUL Recognized

|                            |  |
|----------------------------|--|
| Wire Range (Group E)(AWG)  | 14~2/0                                 |
| Rated voltage (Group E)(V) | 1500                                   |
| Rated current (Group E)(A) | *Single Cable 175A / Double Cable 230A |

## Drawings

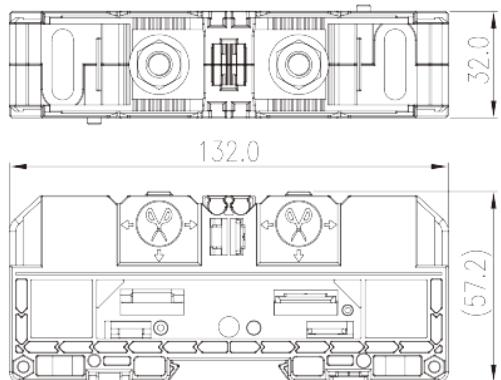

## Approvals

