


0156-9AXX

PCB Terminal Blocks > PCB Connector-Plug

Date:2025-11-04



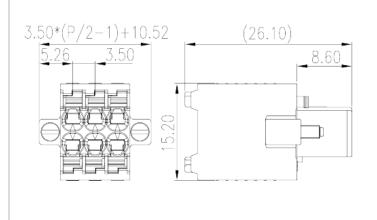

The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design.

The final product is made according to engineering drawing.

Product Description

Pitch: 3.50mm, 300V, 10A

General information

Short description	PCB Connector Plug, Push-in Design
Category	PCB Connector – Plug
Pitch (mm)	3.50
Color	Black (default)
Connection method	Push in Design
Type of locking	With screw flange
Length (mm)	3.50*(P/2-1)+10.52
Width (mm)	15.2
Height (mm)	26.1
Number of positions	04P~40P
Level	Double level

Material information


Insulation material	PA
Insulation material group	I
Flame retardant rating , compliant with UL94	V0



Insulation resistance	\square 500M Ω at DC 500V	
Conductor material	HIGH PERFORMANCE COPPER ALLOY	
Plating of conductor surface	Tin PLATED	
Connection data-IEC		
Rated voltage (V)	320	
Rated current (A)	10	
Rated voltage (II/2)(V)	320	
Rated voltage (III/2) (V)	160	
Rated voltage (III/3)(V)	160	
Rated impulse voltage (II/2)(KV)	2.5	
Rated impulse voltage (III/2)(KV)	2.5	
Rated impulse voltage (III/3)(KV)	2.5	
Conductor cross section solid. min (mm²)	0.2	
Conductor cross section solid.max (mm²)	1.5	
Conductor cross section stranded. min (mm²)	0.2	
Conductor cross section stranded. max (mm²)	1.5	
Conductor cross section flexible, with min ferrule without plastic sleeve (mm²)	0.25	
Conductor cross section flexible, with max ferrule without plastic sleeve (mm²)	1	
Conductor cross section flexible, with min ferrule with plastic sleeve (mm²)	0.25	
Conductor cross section flexible, with max ferrule with plastic sleeve (mm²)	0.75	
2 conductors with same cross section flexible, min twin ferrules with plastic sleeve (mm²)	0.75	
2 conductors with same cross section flexible, max twin ferrules with plastic sleeve (mm²)	0.75	
Slotted screwdriver size (Blade thickness x Width)(mm)	0.4x2.5	
Tightening torque with flange. max (N.m)	0.2	
Stripping Length (mm)	11~12	
Connection data-UL		
Rated voltage (UL/CUL Group B)(V)	300	
Rated current (UL/CUL Group B)(A)	10	
Rated voltage (UL/CUL Group D)(V)	300	
Rated current (UL/CUL Group D)(A)	10	

Min. solid wire connection (AWG) acc. to UL/CUL	26
Max. solid wire connection AWG acc. to UL/CUL	16
Min. stranded wire connection AWG acc. to UL/CUL	26
Max. stranded wire connection AWG acc. to UL/CUL	16
Environment & Safety	
Finger protection (YES or NO)	YES
Operating temperature. max (°C)	120
Operating temperature. min (°C)	-40
UL Recognized	
Wire Range (Group B)(AWG)	26~16
Rated voltage (Group B)(V)	300
Rated current (Group B)(A)	10
Wire Range (Group D)(AWG)	26~16
Rated voltage (Group D)(V)	300
Rated current (Group D)(A)	10
CUL Recognized	
Wire Range (Group B)(AWG)	26~16
Rated voltage (Group B)(V)	300
Rated current (Group B)(A)	10
Wire Ranget (Group D)(AWG)	26~16
Rated voltage (Group D)(V)	300
Rated current (Group D)(A)	10

Drawings

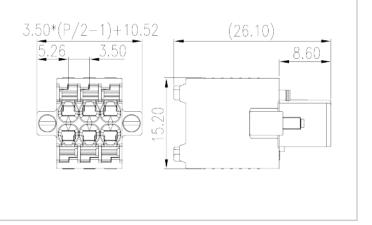

Approvals





