


# EC116CVM-XXP

## PCB Terminal Blocks > PCB Connector-Plug

Date:2026-02-18

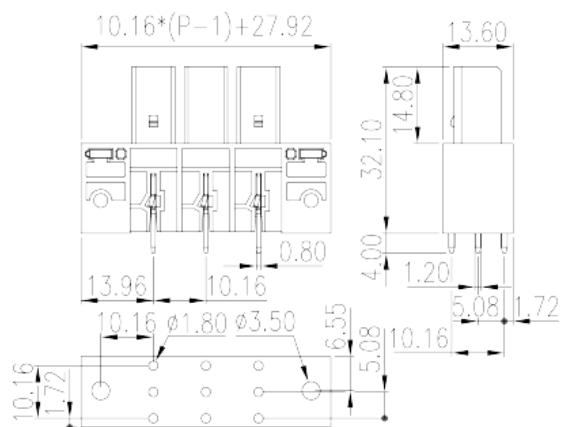

The web catalog is for reference only. Dinkle retains the right of product modification and engineering change of the design.  
The final product is made according to engineering drawing.

## Product Description

Pitch : 10.16mm, 300V, 51A

## General information

Short description	PCB Connector-Plug, Wave soldering
Category	PCB Connector – Plug
Pitch (mm)	10.16
Color	Green (default)
Type of locking	With threaded flange
Soldering method	Wave soldering
Length (mm)	$10.16*(P-1)+27.92$
Width (mm)	13.6
Height (mm)	32.1
Pin demensions (Thickness x Width)(mm)	0.8x1.2
PCB hole diameter (mm)	1.8
Number of positions	02P~10P
Level	Single level

## Material information

Insulation material PA

Insulation material group	I
Flame retardant rating , compliant with UL94	V0
Insulation resistance	$\geq 500M\Omega$ at DC 500V
Conductor material	COPPER ALLOY
Plating of conductor surface	Ag PLATED

### Connection data-IEC

Rated voltage (V)	1000
Rated current (A)	76
Rated voltage (II/2)(V)	1000
Rated voltage (III/2) (V)	1000
Rated voltage (III/3)(V)	630
Rated impulse voltage (II/2)(KV)	8
Rated impulse voltage (III/2)(KV)	8
Rated impulse voltage (III/3)(KV)	8
Tightening torque with flange. max (N.m)	0.5

### Connection data-UL

Rated voltage (UL/CUL Group B)(V)	300
Rated current (UL/CUL Group B)(A)	51
Rated voltage (UL/CUL Group C)(V)	300
Rated current (UL/CUL Group C)(A)	51
Rated voltage (UL/CUL Group D)(V)	600
Rated current (UL/CUL Group D)(A)	5

### Environment & Safety

Finger protection (YES or NO)	YES
Operating temperature. max (°C)	120
Operating temperature. min (°C)	-40

### UL Recognized


Rated voltage (Group B)(V)	300
Rated current (Group B)(A)	51
Rated voltage (Group C)(V)	300
Rated current (Group C)(A)	51

Rated voltage (Group D)(V)	600
Rated current (Group D)(A)	5

## CUL Recognized

Rated voltage (Group B)(V)	300
Rated current (Group B)(A)	51
Rated voltage (Group C)(V)	300
Rated current (Group C)(A)	51
Rated voltage (Group D)(V)	600
Rated current (Group D)(A)	5

## Drawings

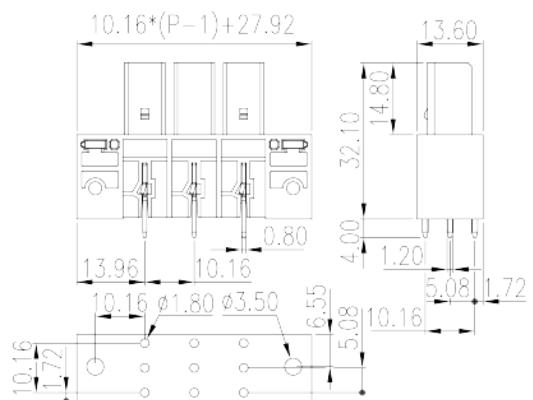

## Approvals

