


DP2.5N-TN-TG

DIN Rail Terminal Blocks > Push-in Design

Date:2025-10-31





The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design.

The final product is made according to engineering drawing.

Product Description

300V, 18A, Beige (default)

General information

Short description	Disconnect Terminal Block, Push-in Design
Category	Disconnect Terminal Block
Color	Refer to drawing
Connection method	Push-in Design
Length (mm)	73.5
Width (mm)	5.1
Height (mm)	38.2 (TS-35N) / 45.7(TS-35/15N)
Level	Single level
Connection points	3

Material information


Insulation material	PA
Insulation material group	I
Flame retardant rating , compliant with UL94	VO
Insulation resistance	□500MΩ at DC 500V
Conductor material	HIGH PERFORMANCE COPPER ALLOY

Plating of conductor surface	Tin PLATED	
Connection data-IEC		
Rated voltage (V)	400	
Rated current (A)	20	
Rated voltage (III/3)(V)	400	
Rated impulse voltage (III/3)(KV)	6	
Conductor cross section solid. min (mm²)	0.2	
Conductor cross section solid.max (mm²)	4	
Conductor cross section stranded. min (mm²)	0.2	
Conductor cross section stranded. max (mm²)	2.5	
Conductor cross section flexible, with min ferrule without plastic sleeve (mm²)	0.25	
Conductor cross section flexible, with max ferrule without plastic sleeve (mm²)	2.5	
Conductor cross section flexible, with min ferrule with plastic sleeve (mm²)	0.25	
Conductor cross section flexible, with max ferrule with plastic sleeve (mm²)	2.5	
2 conductors with same cross section flexible, min twin ferrules with plastic sleeve (mm²)	0.5	
2 conductors with same cross section flexible, max twin ferrules with plastic sleeve (mm²)	0.5	
Slotted screwdriver size (Blade thickness x Width)(mm)	0.6x3.5	
Stripping Length (mm)	10	
Mounting rail	TS-35N \ TS-35/15N	
End cover plate required	YES	
Grounding connections	NO	
Connection data-UL		
Rated voltage (UL/CUL Group B)(V)	300	
Rated current (UL/CUL Group B)(A)	18	
Rated voltage (UL/CUL Group C)(V)	300	
Rated current (UL/CUL Group C)(A)	18	
Min. solid wire connection (AWG) acc. to UL/CUL	26	
Max. solid wire connection AWG acc. to UL/CUL	12	
Min. stranded wire connection AWG acc. to UL/CUL	26	
Max. stranded wire connection AWG acc. to UL/CUL	12	

Environment & Safety

Back of the hand protection (YES or NO)	YES
Finger protection (YES or NO)	YES
Operating temperature. max (°C)	120
Operating temperature. min (°C)	-40

Drawings

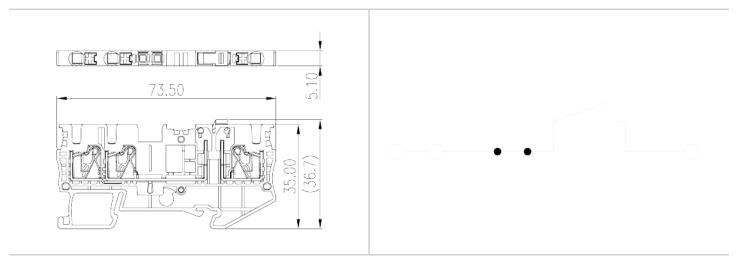

Approvals



