


# DKES1.5N3

DIN Rail Terminal Blocks > Screw Connection

Date:2026-06-16

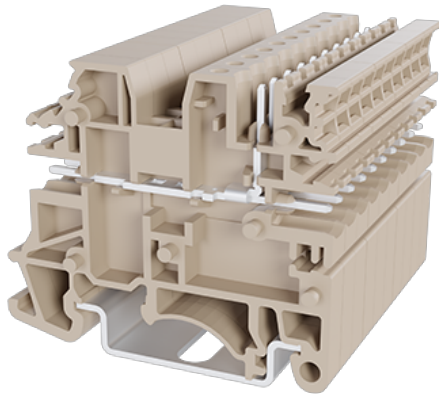

The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design. The final product is made according to engineering drawing.

## Product Description

300V, 15A, Beige (default)

## General information

Short description	Plug-in Connection Terminal Block
Category	Plug-in Connection Terminal Block
Color	Beige (default)
Connection method	Screw Connection
Type of locking	Rail mounting
Length (mm)	50.6
Width (mm)	5.08
Height (mm)	42.5
Number of positions	□1P
Level	Single level
Connection points	3

## Material information

Insulation material	PA
Insulation material group	I
Flame retardant rating , compliant with UL94	V0

Insulation resistance	□500MΩ at DC 500V
Plating of conductor surface	Tin PLATED


### Connection data-IEC

Rated voltage (V)	250
Rated current (A)	24
Rated voltage (III/3)(V)	250
Rated impulse voltage (II/2)(KV)	24
Mounting rail	TS-35N/TS-35/15N
End cover plate required	YES
Grounding connections	NO

### Connection data-UL

Rated voltage (UL/CUL Group B)(V)	300
Rated current (UL/CUL Group B)(A)	15
Rated voltage (UL/CUL Group C)(V)	300
Rated current (UL/CUL Group C)(A)	15

### Drawings

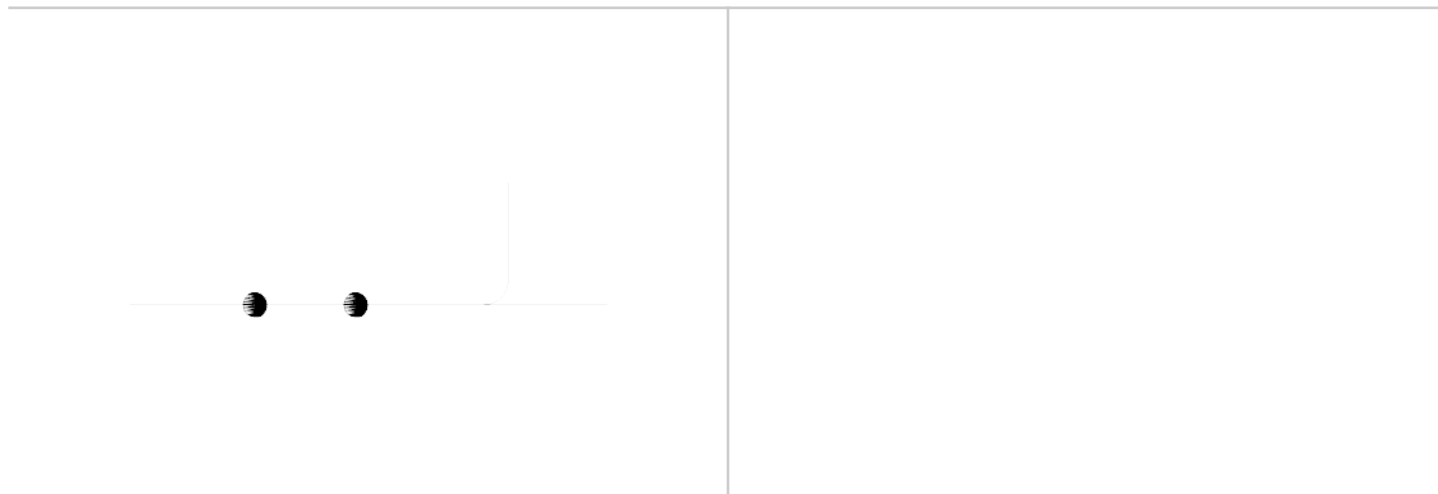

### Approvals



