# DT-25-A02W-XX

Barrier Terminal Blocks > Single Row

Date:2024-04-20Version:1.1

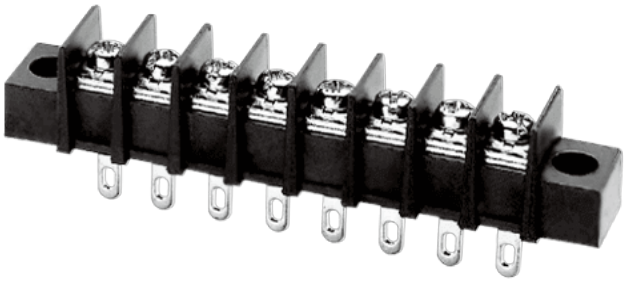

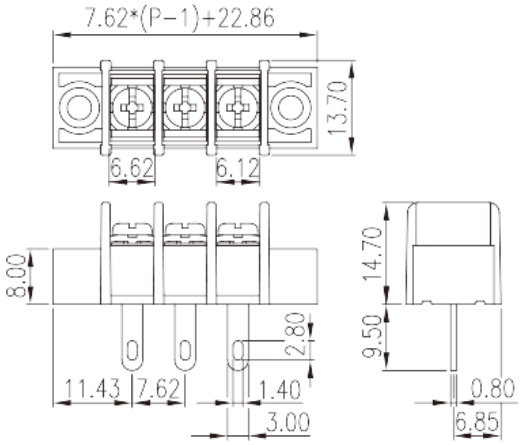


The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design.
The final product is made according to engineering drawing.

## Product Description

Pitch: 7.62mm, M3, 300V, 15A

## General information

| | |
|---|---|
| Short description | Barrier terminal blocks, Screw connection |
| Category | Single Row |
| Pitch (mm) | 7.62 |
| Color | Black (default) |
| Connection method | Screw connection |
| Type of locking | With mounting flange |
| Soldering method | Wave Soldering |
| Length (mm) | 7.62*(P-1)+22.86 |
| Width (mm) | 13.70 |
| Height (mm) | 14.70 |
| Pin demensions (Thickness x Width)(mm) | 0.8x3.0 |
| Number of positions | 02P~31P |
| Level | Single Row |

## Material information

| | |
|---|---|
| Insulation material | PA66 |


© DINKLE ENTERPRISE CO ,LTD. ALL RIGHT RESERVED

| | |
|---|---|
| Insulation material group | I |
| Flame retardant rating , compliant with UL94 | V0 |
| Insulation resistance | □500MΩ at DC 500V |
| Conductor material | COPPER ALLOY |
| Plating of conductor surface | Tin PLATED |

## Connection data-IEC

| | |
|---|---|
| Rated voltage (V) | 320 |
| Rated current (A) | 17.5 |
| Rated voltage (II/2)(V) | 630 |
| Rated voltage (III/2) (V) | 320 |
| Rated voltage (III/3)(V) | 320 |
| Rated impulse voltage (II/2)(KV) | 4 |
| Rated impulse voltage (III/2)(KV) | 4 |
| Rated impulse voltage (III/3)(KV) | 4 |
| Conductor cross section solid. min (mm²) | 0.34 |
| Conductor cross section solid.max (mm²) | 1.5 |
| Conductor cross section stranded. min (mm²) | 0.34 |
| Conductor cross section stranded. max (mm²) | 1.5 |
| 2 conductors with same cross section, solid, max (mm²) | 1 |
| 2 conductors with same cross section, stranded, max (mm²) | 1 |
| Screw thread | M3 |
| Slotted screwdriver size (Blade thickness x Width)(mm) | 0.8x4.0 |
| Philips screwdriver size | PH2 |
| Rated torque (N.m) | 1.4 |
| Recommend tightening torque. min (N.m) | 0.5 |
| Recommend tightening torque. max (N.m) | 1.4 |
| Stripping Length (mm) | 6~7 |

## Connection data-UL

| | |
|---|---|
| Rated voltage (UL/CUL Group B)(V) | 300 |
| Rated current (UL/CUL Group B)(A) | 15 |
| Rated voltage (UL/CUL Group C)(V) | 150 |
| Rated current (UL/CUL Group C)(A) | 15 |


© DINKLE ENTERPRISE CO ,LTD. ALL RIGHT RESERVED

| | |
|---|---|
| Rated voltage (UL/CUL Group D)(V) | 300 |
| Rated current (UL/CUL Group D)(A) | 10 |
| Min. solid wire connection (AWG) acc. to UL/CUL | 22 |
| Max. solid wire connection AWG acc. to UL/CUL | 14 |
| Min. stranded wire connection AWG acc. to UL/CUL | 22 |
| Max. stranded wire connection AWG acc. to UL/CUL | 14 |

## Environment & Safety

| | |
|---|---|
| Back of the hand protection (YES or NO) | YES |
| Operating temperature. max (°C) | 120 |
| Operating temperature. min (°C) | -40 |

## UL Recognized

| | |
|---|---|
| Wire Range (Group B)(AWG) | 22~14 |
| Rated voltage (Group B)(V) | 300 |
| Rated current (Group B)(A) | 15 |
| Wire Range (Group C)(AWG) | 22~14 |
| Rated voltage (Group C)(V) | 150 |
| Rated current (Group C)(A) | 15 |
| Wire Range (Group D)(AWG) | 22~14 |
| Rated voltage (Group D)(V) | 300 |
| Rated current (Group D)(A) | 10 |

## CUL Recognized

| | |
|---|---|
| Wire Range (Group B)(AWG) | 22~14 |
| Rated voltage (Group B)(V) | 300 |
| Rated current (Group B)(A) | 15 |
| Wire Range (Group C)(AWG) | 22~14 |
| Rated voltage (Group C)(V) | 150 |
| Rated current (Group C)(A) | 15 |
| Wire Ranget (Group D)(AWG) | 22~14 |
| Rated voltage (Group D)(V) | 300 |
| Rated current (Group D)(A) | 10 |

## CSA


© DINKLE ENTERPRISE CO ,LTD. ALL RIGHT RESERVED

| | |
|---|---|
| Wire Range (AWG) | 22~16 |
| Rated voltage (V) | 300 |
| Rated current (A) | 10 |

## Drawings

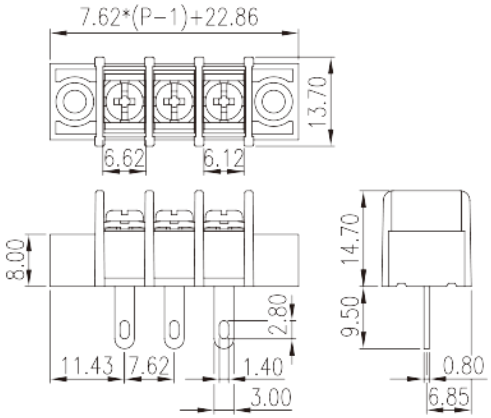


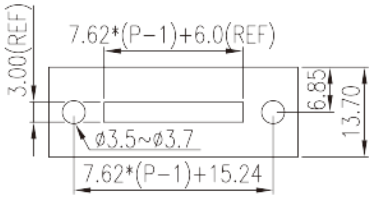


## Approvals


© DINKLE ENTERPRISE CO ,LTD. ALL RIGHT RESERVED