


4DSDB-14-XX

Barrier Terminal Blocks > Pluggable

Date:2025-11-04Version:1.1



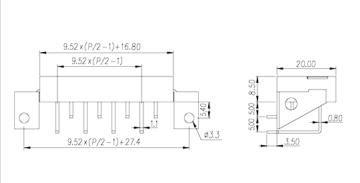

The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design.

The final product is made according to engineering drawing.

Product Description

Pitch: 9.50 mm, 300V, 15A

General information

Short description	Barrier terminal blocks, Screw connection
Category	Pluggable terminal blocks
Pitch (mm)	9.50
Color	Black (default)
Connection method	Screw connection
Type of locking	With threaded flange
Pin demensions (Thickness x Width)(mm)	0.8x1.1
PCB hole diameter (mm)	1.6~1.7
Level	Double level

Material information

Insulation material	PBT
Insulation material group	IIIa
Flame retardant rating , compliant with UL94	VO
Conductor material	Copper Alloy
Plating of conductor surface	Gold plated



Connection data-IEC

Rated voltage (V)	630
Rated current (A)	24
Rated voltage (II/2)(V)	630
Rated voltage (III/2) (V)	320
Rated voltage (III/3)(V)	320
Rated impulse voltage (II/2)(KV)	4
Rated impulse voltage (III/2)(KV)	4
Rated impulse voltage (III/3)(KV)	4
Rated voltage (UL/CUL Group B)(V)	300
Connection data-UL	
Rated current (UL/CUL Group B)(A)	15
Rated voltage (UL/CUL Group D)(V)	300
	10
Rated current (UL/CUL Group D)(A)	10
Environment & Safety	
Back of the hand protection (YES or NO)	YES
Operating temperature. max (°C)	130
Operating temperature. min (°C)	-40
JL Recognized	
Rated voltage (Group R)(V)	300

Rated voltage (Group B)(V)	300
Rated current (Group B)(A)	15
Rated voltage (Group C)(V)	300
Rated current (Group C)(A)	10

CUL Recognized


Rated voltage (Group B)(V)	300
Rated current (Group B)(A)	15
Rated voltage (Group C)(V)	300
Rated current (Group C)(A)	10


VDE Approval

Rated voltage (V)	630

Rated current (A) 24

Drawings





Approvals







