


# EC381CV-XXP

PCB Terminal Blocks > PCB Connector-Plug

Date:2025-11-16Version:V1



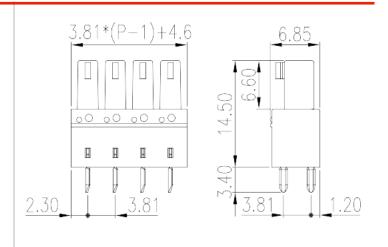

The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design.

The final product is made according to engineering drawing.

### **Product Description**

Pitch: 3.81 mm, 300V, 8A

#### General information


Short description	PCB Connector – Plug, Wave soldering
Category	PCB Connector – Plug
Pitch (mm)	3.81
Color	Green (default)
Type of locking	Without
Soldering method	Wave soldering
Length (mm)	3.81*(P-1)+4.6
Width (mm)	6.85
Height (mm)	14.5
Pin demensions (Thickness x Width)(mm)	0.6x1.1
PCB hole diameter (mm)	1.2
Number of positions	02P~16P
Level	Single level

#### Material information

Insulation material	PA
---------------------	----

Insulation material group	I
Flame retardant rating , compliant with UL94	VO
Insulation resistance	□500MΩ at DC 500V
Conductor material	COPPER ALLOY
Plating of conductor surface	Tin PLATED
Connection data-IEC	
Rated voltage (V)	320
Rated current (A)	12
Rated voltage (II/2)(V)	320
Rated voltage (III/2) (V)	320
Rated voltage (III/3)(V)	250
Rated impulse voltage (II/2)(KV)	2.5
Rated impulse voltage (III/2)(KV)	2.5
Rated impulse voltage (III/3)(KV)	2.5
Connection data-UL  Rated voltage (UL/CUL Group B)(V)  Rated current (UL/CUL Group B)(A)	300
Rated voltage (UL/CUL Group D)(V)	300
Rated current (UL/CUL Group D)(A)	8
Environment & Safety	
Finger protection (YES or NO)	YES
Operating temperature. max (°C)	120
Operating temperature. min (°C)	-40
JL Recognized	
Rated voltage (Group B)(V)	300
Rated current (Group B)(A)	8
CUL Recognized	
Rated voltage (Group B)(V)	300

## Drawings

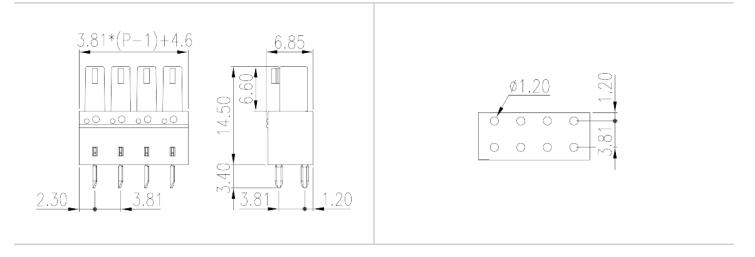

## Approvals





