


# RE-3814

Electronics & Interface > Industrial Relay

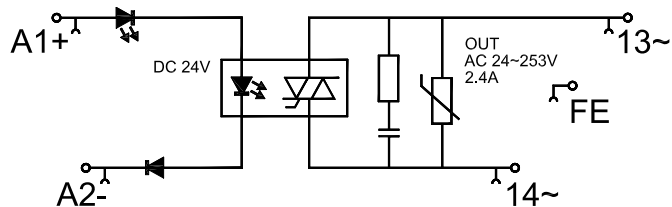

The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design.  
The final product is made according to engineering drawing.

## Technical Data

Input (Control side) Data	
Rated input voltage	24 VDC
Rated input current	8 mA
Status indicator	(Red) LED
Max. Switching frequency	10 Hz
Input polarity	Monopolar
Gate voltage ON / OFF	19.2 VDC / 16.8 VDC
Output (Load side) Data	
Rated Switching voltage	24~253 VAC
Continuous current	2.4 A
General Data	
Input type	-
Connection method	PID connection
Wire range (AWG) / (mm <sup>2</sup> )	24~14 / 0.25~2.5
Impulse withstand voltage	2.5 KV
Wire strip length (mm)	10
TxWxH (mm)	6.2 x 92 x 64.3
Package	10pcs



## Approvals

---

