
DKZ16

Bornas de Conexión de Carril DIN > bornas de conexión de barras de bus

Date:2026-11-14Version:1.1



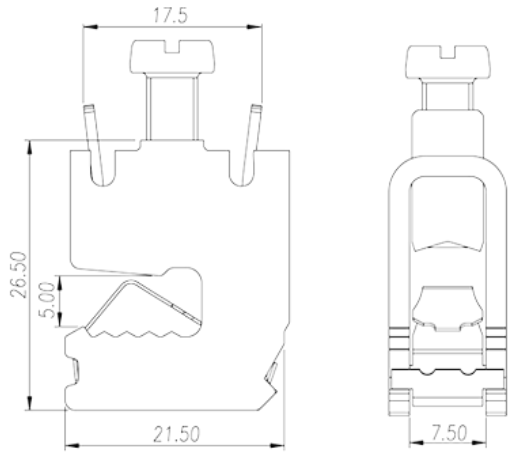

The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design. The final product is made according to engineering drawing.

Descripción del producto

M5, Steel

Informacion General

Descripción corta	DIN Rail terminal blocks, Busbar terminal blocks
Metodo de conexión	Screw connection
Tipo de anclaje	Busbar mounting
Numero de contactos	1

Datos IEC

Minima sección coductor solido (mm²)	1.5
Máxima sección coductor solido (mm²)	16
Minima sección coductor cablecillo (mm²)	1.5
Maxima sección coductor cablecillo (mm²)	16
Rosca de tornillo	M5
Tamaño destonillador (Espesor del cuerpo x anchura) (mm)	1.0x5.5
Tamaño destornillador Philips	PH2
Apriete recomendado min. (N.m)	2
Apriete recomendado max. (N.m)	4

© DINKLE ENTERPRISE CO ,LTD. ALL RIGHT RESERVED

Cubierta final requerida	NO
Conexiones de toma de masa	NO

Datos UL

Máximo AWG hilo rigido acc to UL/CUL	14
Máximo AWG hilo rigido acc to UL/CUL	4
Mínimo AWG cablecillo acc to UL/CUL	14
Máximo AWG cablecillo acc to UL/CUL	4

Medio ambiente & Seguridad

Protección trasera (Si or No)	NO
Protección tactil (si o No)	NO


Homologación UL

Rango sección conductor Group B)(AWG)	14~4

Homologación CUL

Rango sección conductor Group B)(AWG)	14~4

Dibujo

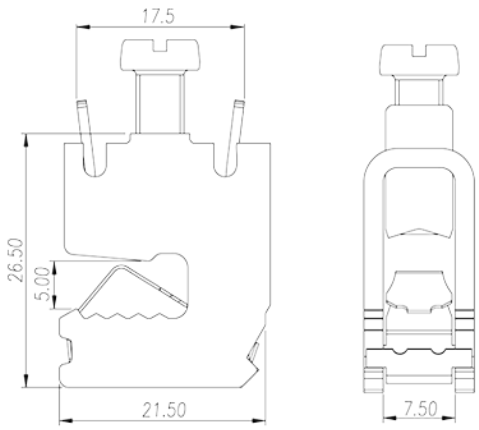

Aprobaciones

© DINKLE ENTERPRISE CO ,LTD. ALL RIGHT RESERVED

© DINKLE ENTERPRISE CO ,LTD. ALL RIGHT RESERVED