

DKZ35A

Bornas de Conexión de Carril DIN > bornas de conexión de barras de bus

Date:2026-11-14Version:1.1

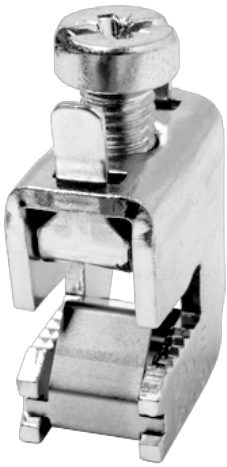

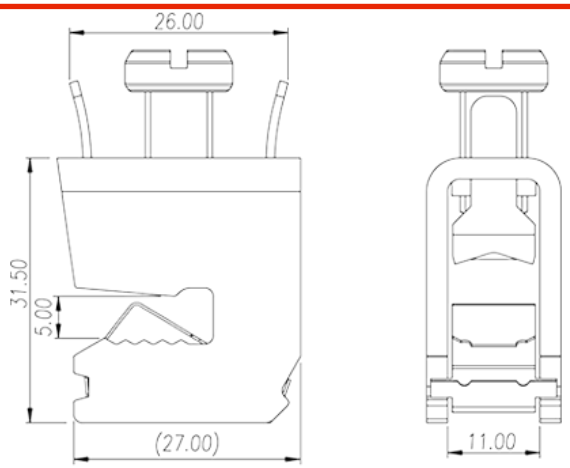

The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design. The final product is made according to engineering drawing.

Descripción del producto

M8, Steel

Informacion General

Descripción corta	DIN Rail terminal blocks, Busbar terminal blocks
Metodo de conexión	Screw connection
Tipo de anclaje	Busbar mounting
Numero de contactos	1

Datos IEC

Minima sección coductor solido (mm²)	4
Máxima sección coductor solido (mm²)	35
Minima sección coductor cablecillo (mm²)	4
Maxima sección coductor cablecillo (mm²)	35
Rosca de tornillo	M8
Tamaño destonillador (Espesor del cuerpo x anchura) (mm)	1.0x5.5
Tamaño destornillador Philips	PH3
Máximo apriete (N.m)	6
Cubierta final requerida	NO

© DINKLE ENTERPRISE CO ,LTD. ALL RIGHT RESERVED

Conexiones de toma de masa	NO


Datos UL

Máximo AWG hilo rigido acc to UL/CUL	10
Máximo AWG hilo rigido acc to UL/CUL	2
Mínimo AWG cablecillo acc to UL/CUL	10
Máximo AWG cablecillo acc to UL/CUL	2

Medio ambiente & Seguridad

Protección trasera (Si or No)	NO
Protección tactil (si o No)	NO

Dibujo

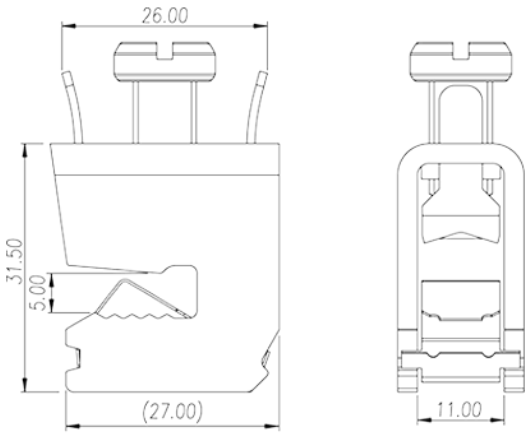

Aprobaciones

© DINKLE ENTERPRISE CO ,LTD. ALL RIGHT RESERVED