


0241-C1XX

Electronics & Interface > Signal Interface Modules

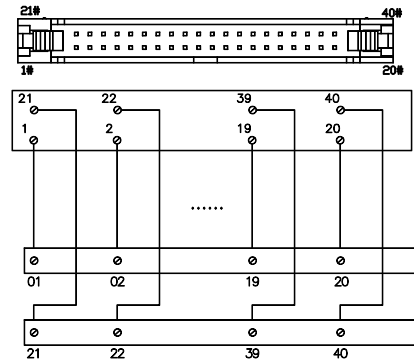

The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design.
The final product is made according to engineering drawing.

Specification

Specification		
Connection method		PID
Rated voltage		24 VDC
Rated current		1 A
Wire range		26~16 AWG
Stripping length		9~10 mm
Applicable ferrules		DN00510D DN00710D
Input type		NPN / PNP
Connector		IDC
Indicator		NO
Wire harness	Shielded	WHS33
	Unshielded	WHN33

Specification		
Part Number	Number of Connections	L x W x H (mm)
0241-C114	14 poles	38.2 x 47.9 x 43
0241-C120	20 poles	49.8 x 47.9 x 43
0241-C126	26 poles	60.5 x 47.9 x 43
0241-C130	30 poles	68 x 47.9 x 43
0241-C134	34 poles	68 x 47.9 x 43
0241-C140	40 poles	76 x 47.9 x 43



Approvals

☒ **RoHS** ☒ **CE**