
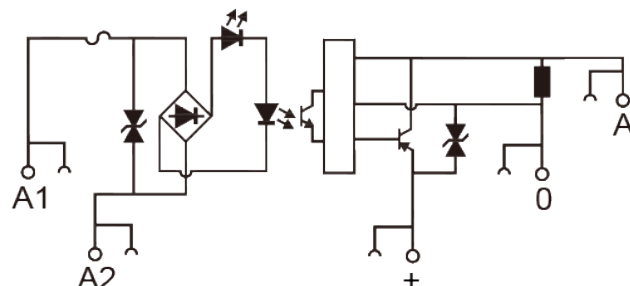


# RE-3714

Electronics & Interface > Industrial Relay

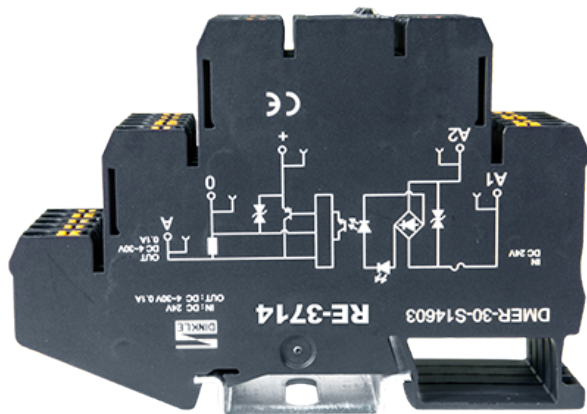

The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design.  
The final product is made according to engineering drawing.

## Technical Data

Input (Control side) Data	
Rated input voltage	24 VDC
Rated input current	10 mA
Status indicator	(Red) LED
Max. Switching frequency	200 kHz
Input polarity	Bipolar
Gate voltage ON / OFF	19.2 VDC / 16.8 VDC
Output (Load side) Data	
Rated Switching voltage	4~30 VDC
Continuous current	0.1 A
Voltage drop at Max	≤ 1 V
Leakage current	≒ 0 uA
General Data	
Connection type	Output:PNP (3-Conductor)
Connection method	PID connection
Wire range (AWG) / (mm <sup>2</sup> )	24~14 / 0.25~2.5
Impulse withstand voltage	2.5 KV
Wire strip length (mm)	10



Insulating material	PA
Torque (N-m / lb-in)	-
TxWxH (mm)	6.2 x 92 x 64.3
Package	10pcs

## Approvals

