
0149-6C09

Relay Socket



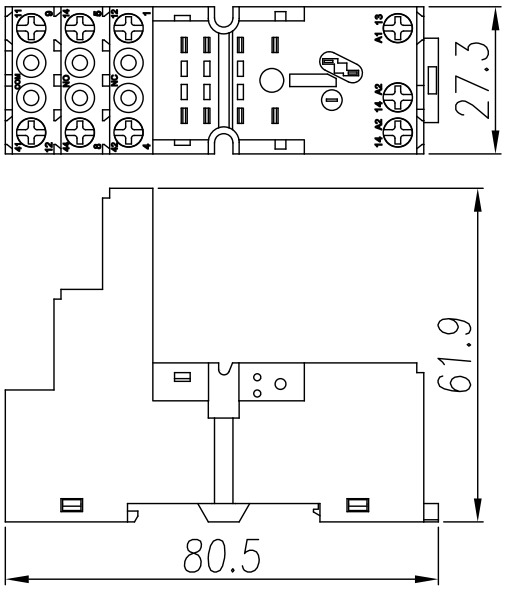

Specification

Rated Voltage	300VAC
Rated Current	12A
Between Coil and Contacts	4000V/S
Between Contacts	2500V/S
External Connection Wire	20-14AWG/0.5-2.5mm^2
Screw Torque	0.8N•m
External Terminal Protection	IP20
Ambient Temperature	-40~+85℃
Accessories	
Pastic Retaining Clip	0149-6A01
Metal Retaining Clip	0149-6A05
Din Rail	TS-35

TEL : +886-2-8069-9000 / E-mail : service@dinkle.com
© DINKLE ENTERPRISE CO., LTD. ALL RIGHT RESERVED