


# AK2.5-TR

DIN

>

:2026-05-14

:1.1

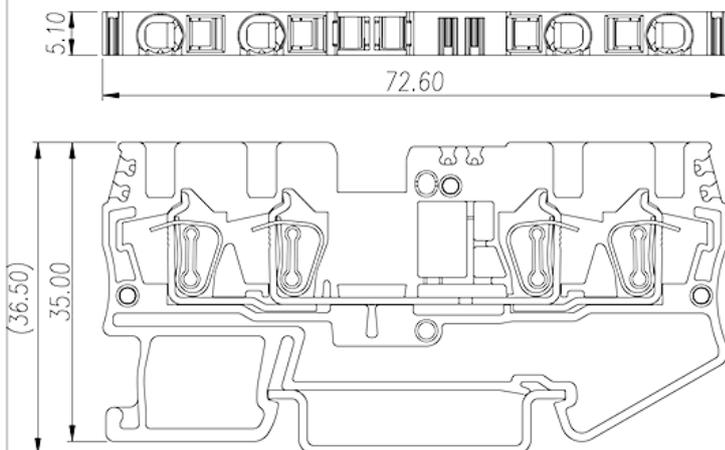

600V, 18A, Beige (default)

	DIN Rail terminal blocks, Feed through terminal blocks
	Feed through terminal blocks
	Beige (default)
	Spring Clamp Connection
	Rail Mounting
(mm)	72.6
(mm)	5.1
(mm)	35
	Single level
	4
	PA
	I
UL 94	V0
	500M at DC 500V

-IEC

(V)	800
(A)	24
(III/3)(V)	800
(III/3)(KV)	8
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	4
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	2.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	2.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	2.5
Width)(mm) (Blade thickness x	0.6x3.5
	10
	TS-35
	YES
	NO

### -UL

(UL/CUL Group B)(V)	600
(UL/CUL Group B)(A)	18
(UL/CUL Group C)(V)	600
(UL/CUL Group C)(A)	18
UL/CUL AWG	30
UL/CUL AWG	12
UL/CUL AWG	30
UL/CUL AWG	12

### &

(YES or NO)	YES
가 (YES or NO)	YES
	120

-40

**UL**

(Group B) (AWG)	30~12
(Group B) (V)	600
(Group B) (A)	18
(Group C) (AWG)	30~12
(Group C) (V)	600
(Group C) (A)	18

**CUL**

(Group B) (AWG)	30~12
(Group B) (V)	600
(Group B) (A)	18
(Group C) (AWG)	30~12
(Group C) (V)	600
(Group C) (A)	18

**VDE**

(mm <sup>2</sup> )	0.2~2.5
(V)	800
(A)	24

