
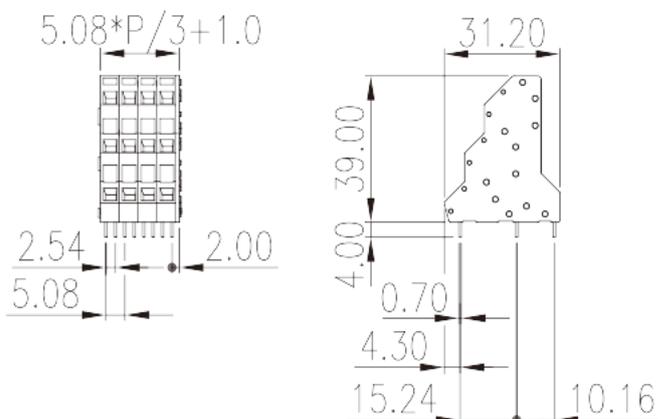


W3K508-XXP

PCB > PCB

:2026-05-14 :V1

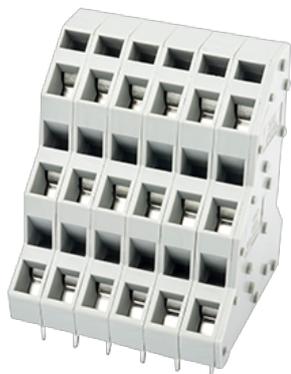

Pitch : 5.08mm, 300V, 10A

	PCB Terminal Blocks, Spring Clamp Connection
	PCB Terminal Blocks
(mm)	5.08
	Grey (default)
	Spring Clamp Connection
	Without
(mm)	$5.08 * (P/3 - 1) + 6.08$
(mm)	31.2
(mm)	39
(x) (mm)	0.7x0.7
PCB (mm)	1.2
()	03P~72P
	Triple level
	PA
	I
UL 94	V0



	500M at DC 500V
	COPPER ALLOY
	Tin PLATED

-IEC

(V)	450
(A)	24
(II/2)(V)	630
(III/2)(V)	320
(III/3)(V)	320
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4
(mm ²)	0.5
(mm ²)	2.5
(mm ²)	0.5
(mm ²)	2.5
(mm ²) , ,	0.5
(mm ²) , ,	1.5
(mm ²) , ,	0.5
(mm ²) , ,	1.5
² (mm ²) , ,	0.5
² (mm ²) , ,	1
	0.6x3.5
	6~7

-UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	10
(UL/CUL Group C)(V)	150
(UL/CUL Group C)(A)	10
(UL/CUL Group D)(V)	300



(UL/CUL Group D)(A)		10
UL/CUL	AWG	28
UL/CUL	AWG	12
UL/CUL	AWG	28
UL/CUL	AWG	12

&

가	(YES or NO)	YES
		120
		-40

UL

(Group B)(AWG)		28~12
(Group B)(V)		300
(Group B)(A)		10
(Group C)(AWG)		28~12
(Group C)(V)		150
(Group C)(A)		10
(Group D)(AWG)		28~12
(Group D)(V)		300
(Group D)(A)		10

CUL

(Group B)(AWG)		28~12
(Group B)(V)		300
(Group B)(A)		10
(Group C)(AWG)		28~12
(Group C)(V)		150
(Group C)(A)		10
(Group D)(AWG)		28~12
(Group D)(V)		300
(Group D)(A)		10

VDE

(mm ²)		0.5~2.5
--------------------	--	---------

(V)	450
(A)	24

