


2ESDV-XXP

PCB > PCB -

:2026-03-31 :1.2

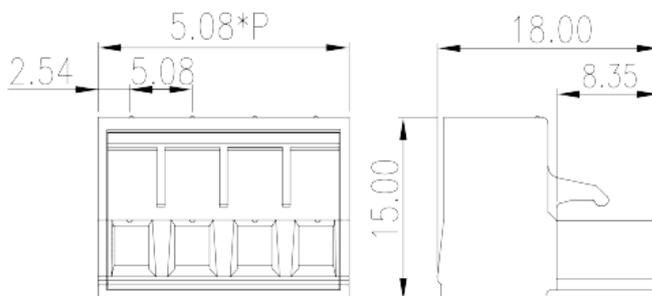

Pitch : 5.08 mm, 300V, 15A

	PCB Connector Plug, Screw Connection
	PCB Connector – Plug
(mm)	5.08
	Green (default)
	Screw Connection
	Without
(mm)	5.08*P
(mm)	18
(mm)	15
()	02P~24P
	Single level
	PA
	I
UL 94	V0
	500M at DC 500V
	COPPER ALLOY

		Tin PLATED
-IEC		
(V)		600
(A)		18
(II/2)(V)		600
(III/2)(V)		320
(III/3)(V)		250
(II/2)(KV)		4
(III/2)(KV)		4
(III/3)(KV)		4
(mm ²)		0.2
(mm ²)		4
(mm ²)		0.2
(mm ²)		2.5
(mm ²)	,	0.25
(mm ²)	,	2.5
(mm ²)	,	0.25
(mm ²)	,	2.5
2	(mm ²)	1.5
2	(mm ²)	1.5
(mm ²) ²	,	0.25
(mm ²) ²	,	1
(mm ²) ²	,	0.5
(mm ²) ²	,	1.5
		M2.5
Width)(mm)	(Blade thickness x	0.6x3.5
Philips		PH1
(N.m)		0.5
		7~8

-UL

(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		15
(UL/CUL Group D)(V)		300
(UL/CUL Group D)(A)		10
UL/CUL	AWG	28
UL/CUL	AWG	12
UL/CUL	AWG	30
UL/CUL	AWG	12

&

	(YES or NO)	YES
가	(YES or NO)	YES
		120
		-40

UL

(Group B)(AWG)		28~12(sol) ; 30~12(str)
(Group B)(V)		300
(Group B)(A)		15
(Group D)(AWG)		28~12(sol) ; 30~12(str)
(Group D)(V)		300
(Group D)(A)		10

CUL

(Group B)(AWG)		28~12(sol) ; 30~12(str)
(Group B)(V)		300
(Group B)(A)		15
(Group D)(AWG)		28~12(sol) ; 30~12(str)
(Group D)(V)		300
(Group D)(A)		10

VDE

(mm ²)		0.2~4(sol)/0.2~2.5(str)
--------------------	--	-------------------------

(V)	600
(A)	18

