
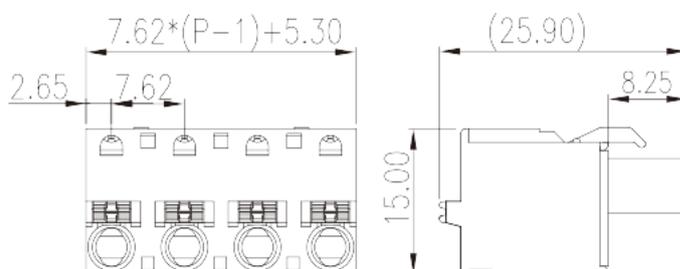


# 3ESDS-XXP

PCB > PCB -

:2026-05-14 :1.1

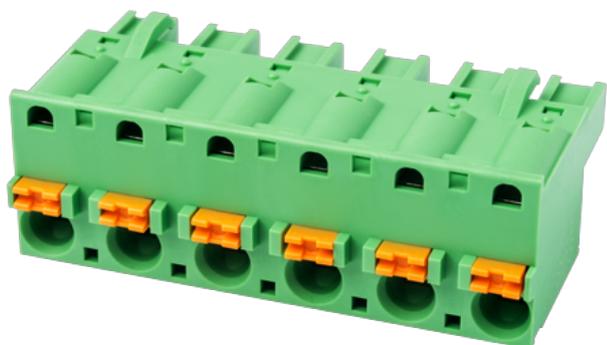

Pitch : 7.62 mm, 300V, 10A

	PCB Connector – Plug, Push-in Design
	PCB Connector – Plug
(mm)	7.62
	Green (default)
	Push in Design
	Without
(mm)	$7.62 * (P - 1) + 5.30$
(mm)	25.9
(mm)	15
( )	02P~12P
	Single level
	PA
	I
UL 94	V0
	500M at DC 500V
	COPPER ALLOY

Tin PLATED

**-IEC**

(V)	800
(A)	15
(II/2)(V)	800
(III/2)(V)	630
(III/3)(V)	500
(II/2)(KV)	6
(III/2)(KV)	6
(III/3)(KV)	6
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	2.5
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	2.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	2.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	2.5
2 (mm <sup>2</sup> )	1.5
2 (mm <sup>2</sup> ) , ,	0.5
2 (mm <sup>2</sup> ) , ,	1
	10~11

**-UL**

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	10
UL/CUL AWG	26
UL/CUL AWG	12
UL/CUL AWG	26
UL/CUL AWG	12

&

가 (YES or NO)	YES
	120
	-40

VDE

(mm <sup>2</sup> )	0.2~2.5
(V)	800
(A)	15

