


EC880V-XXP

PCB > PCB -

:2026-03-30 :1.1

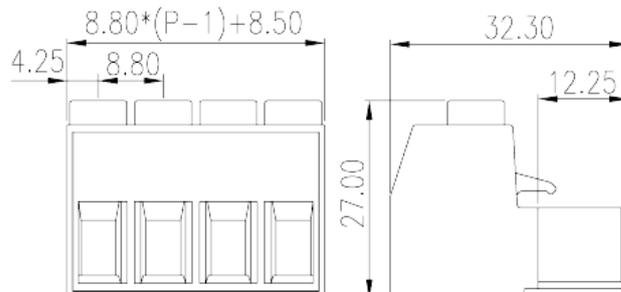

Pitch : 8.80 mm, 600V, 30A

	PCB Connector Plug, Screw Connection
	PCB Connector Plug
(mm)	8.80
	Green(default)
	Screw Connection
	Without
(mm)	$8.80 \times (P-1) + 8.50$
(mm)	32.3
(mm)	27
()	02~12
	Single level

	PA
	I
UL 94	V0
	Copper Alloy
	Tinned

-IEC

(A)	57
(II/2)(V)	1000
(III/2)(V)	1000
(III/3)(V)	800
(II/2)(KV)	8
(III/2)(KV)	8
(III/3)(KV)	8
(mm ²)	0.5
(mm ²)	10
(mm ²)	0.5
(mm ²)	10
(mm ²) , ,	0.5
(mm ²) , ,	6
(mm ²) , ,	0.5
(mm ²) , ,	4
2 (mm ²)	4
2 (mm ²)	4
(mm ²) 2 , ,	0.5
(mm ²) 2 , ,	2.5
2 (mm ²) , ,	0.5
2 (mm ²) , ,	2.5
	M4
Width)(mm) (Blade thickness x	1.0x5.5
Philips	PH2
(N.m)	1.8
	8~9

-UL

(UL/CUL Group B)(V)	600
---------------------	-----



(UL/CUL Group B)(A)		30
(UL/CUL Group C)(V)		600
(UL/CUL Group C)(A)		30
(UL/CUL Group D)(V)		600
(UL/CUL Group D)(A)		5
UL/CUL	AWG	18
UL/CUL	AWG	8
UL/CUL	AWG	18
UL/CUL	AWG	8

&

가	(YES or NO)	YES
		115
		-40

UL

(Group B)(AWG)		18~8
(Group B)(V)		600
(Group B)(A)		30
(Group C)(AWG)		18~8
(Group C)(V)		600
(Group C)(A)		30
(Group D)(AWG)		18~8
(Group D)(V)		600
(Group D)(A)		5

CUL

(Group B)(AWG)		18~8
(Group B)(V)		600
(Group B)(A)		30
(Group C)(AWG)		18~8
(Group C)(V)		600
(Group C)(A)		30
(Group D)(AWG)		18~8
(Group D)(V)		600

(Group D)(A)

5

