
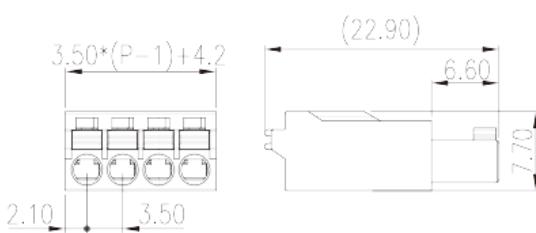


0221-20XX

PCB > PCB -

:2026-02-09 :1.1

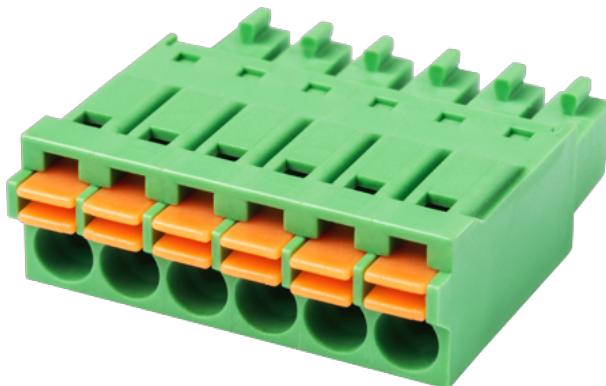

Pitch : 3.50 mm, 300V, 8A

	PCB Connector – Plug, Push-in Design
	PCB Connector – Plug
(mm)	3.50
	Green (default)
	Push in Design
	Without
(mm)	3.50*(P-1)+4.2
(mm)	7.7
(mm)	22.9
()	02P~20P
	Single level

UL 94	PA I V0
	500M at DC 500V COPPER ALLOY

Tin PLATED

-IEC

(V)		320
(A)		8
(II/2)(V)		320
(III/2)(V)		160
(III/3)(V)		160
(II/2)(KV)		2.5
(III/2)(KV)		2.5
(III/3)(KV)		2.5
(mm ²)		0.2
(mm ²)		1.5
(mm ²)		0.2
(mm ²)		1.5
(mm ²) , , ,		0.25
(mm ²) , , ,		1
(mm ²) , , ,		0.25
(mm ²) , , ,		0.75
Width)(mm)	(Blade thickness x	0.4x2.5
		8~10

-UL

(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		8
UL/CUL	AWG	24
UL/CUL	AWG	16
UL/CUL	AWG	24
UL/CUL	AWG	16

&

가	(YES or NO)	YES
---	-------------	-----

	120
	-40

UL


(Group B)(AWG)	24~16
(Group B)(V)	300
(Group B)(A)	8

CUL

(Group B)(AWG)	24~16
(Group B)(V)	300
(Group B)(A)	8

VDE

(mm ²)	0.2~1.5
(V)	320
(A)	8

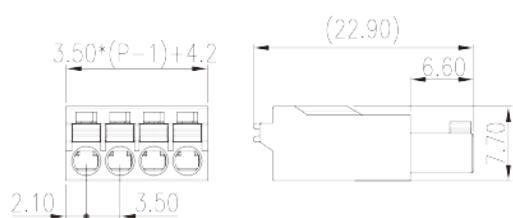



Delight Through Connections