
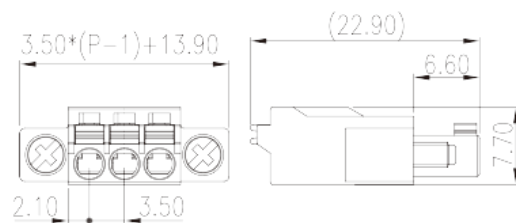


0221-28XX

PCB > PCB -

:2026-07-04 :1.1

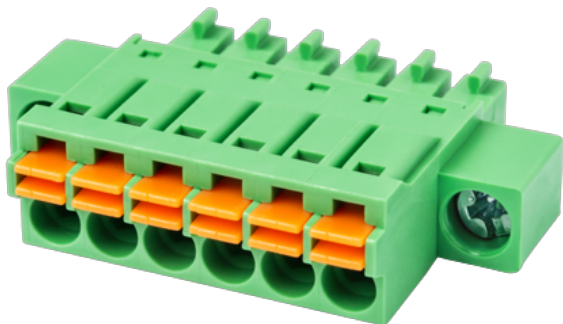

Pitch : 3.50 mm, 300V, 8A

	PCB Connector – Plug, Push-in Design
	PCB Connector – Plug
(mm)	3.50
	Green (default)
	Push in Design
	With screw flange
(mm)	$3.50 * (P - 1) + 13.9$
(mm)	7.7
(mm)	22.9
()	02P~20P
	Single level
	PA
	I
UL 94	V0
	500M at DC 500V
	COPPER ALLOY

Tin PLATED

-IEC

(V)	320
(A)	8
(II/2)(V)	320
(III/2)(V)	160
(III/3)(V)	160
(II/2)(KV)	2.5
(III/2)(KV)	2.5
(III/3)(KV)	2.5
(mm ²)	0.2
(mm ²)	1.5
(mm ²)	0.2
(mm ²)	1.5
(mm ²) , ,	0.25
(mm ²) , ,	1
(mm ²) , ,	0.25
(mm ²) , ,	0.75
Width)(mm) (Blade thickness x	0.4x2.5
	8~10

-UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	8
UL/CUL AWG	24
UL/CUL AWG	16
UL/CUL AWG	24
UL/CUL AWG	16

&

가 (YES or NO)	YES
---------------	-----

	120
	-40

UL


(Group B) (AWG)	24~16
(Group B) (V)	300
(Group B) (A)	8

CUL

(Group B) (AWG)	24~16
(Group B) (V)	300
(Group B) (A)	8

VDE

(mm ²)	0.2~1.5
(V)	320
(A)	8

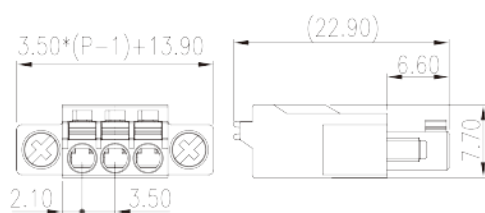



Delight Through Connections