
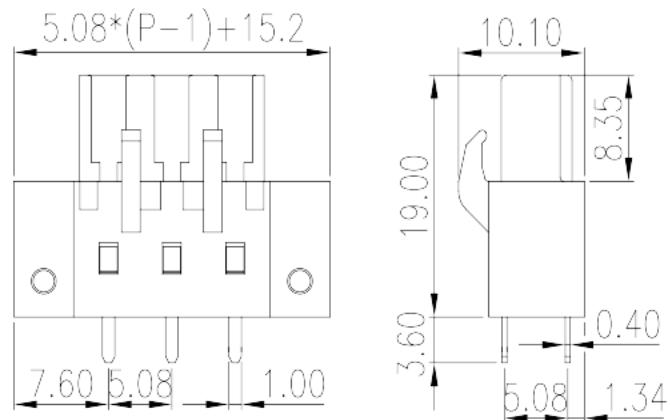


# 2ESDCVM-XXP

PCB &gt; PCB -

:2026-02-09 :V1

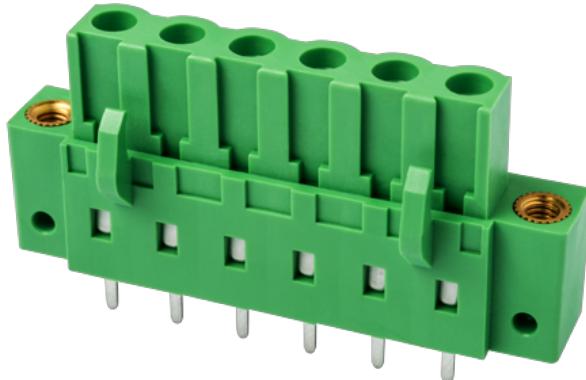

Pitch : 5.08mm, 300V, 12A

	PCB Connector – Plug, Wave soldering
	PCB Connector – Plug
(mm)	5.08
	Green (default)
	With threaded flange
	Wave soldering
(mm)	5.08*(P-1)+15.2
(mm)	10.1
(mm)	19
(    x    ) (mm)	0.4x1.0
PCB (mm)	1.3~1.5
(    )	02P~20P
	Single level

UL 94	PA I V0
-------	---------------

500M at DC 500V

COPPER ALLOY

Tin PLATED

**-IEC**




(V)	630
(A)	18
(II/2)(V)	630
(III/2)(V)	320
(III/3)(V)	320
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4
(N.m)	0.3

**-UL**

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	12

**&**

가	(YES or NO)	YES
		120
		-40

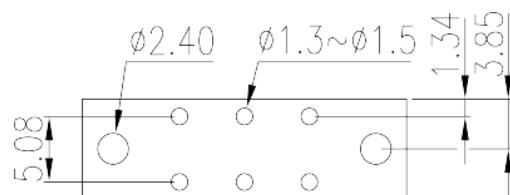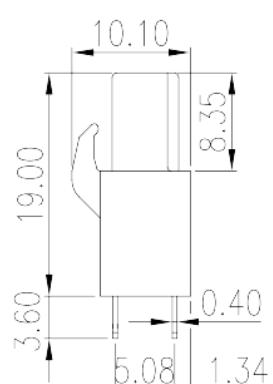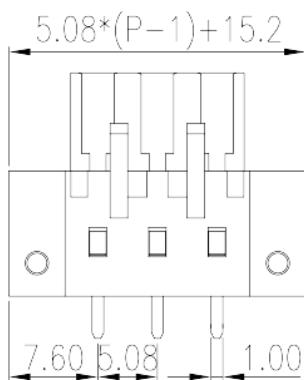



Delight Through Connections

---

CE

