


## AK10-TN

DIN > :2025-11-05 :1.1



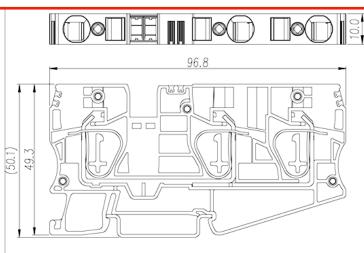

600V, 40A, Beige (default)

	DIN Rail terminal blocks, Feed through termina blocks
	Feed through terminal blocks
	Beige (default)
	Spring Clamp Connection
	Rail Mounting
mm)	96.8
(mm)	10
(mm)	49.3
	Single level
	3

	PA
	I
UL 94	VO
	500M at DC 500V

-IEC

(V) (A)		57
(III/3)(V)		800
(II/2)(KV)		8
(III/2)(KV)		8
(III/3)(KV)		8
(mm <sup>2</sup> )		1.5
(mm ² )		16
(mm <sup>2</sup> )		1.5
(mm <sup>2</sup> )		10
(mm²)		1.5
(mm <sup>2</sup> )		10
(mm <sup>2</sup> )		1.5
(mm <sup>2</sup> )		10
2 (mm ²)	, ,	1.5
2 (mm <sup>2</sup> )		2.5
(Blade thickness x Width)(mm)		1.0x5.5
		18
		TS-35
		YES
		NO
-UL		
(UL/CUL Group B)	V)	600
(UL/CUL Group B)(A)		40
(UL/CUL Group C)(V)		600
(UL/CUL Group C)(A)		40
UL/CUL	AWG	24
UL/CUL	AWG	6
UL/CUL	AWG	24
UL/CUL	AWG	6



&

	(YES or NO)	YES
가	(YES or NO)	YES
		120
		-40

## UL

(Group B)(AWG)	24~6
(Group B)(V)	600
(Group B)(A)	40
(Group C)(AWG)	24~6
(Group C)(V)	600
(Group C)(A)	40

## CUL

(Group B)(AWG)	24~6
(Group B)(V)	600
(Group B)(A)	40
(Group C)(AWG)	24~6
(Group C)(V)	600
(Group C)(A)	40

## **VDE**

(mm <sup>2</sup> )	1.5~10
(V)	800
(A)	57

