




AK10-TN

DIN

>

:2026-02-09

:1.1

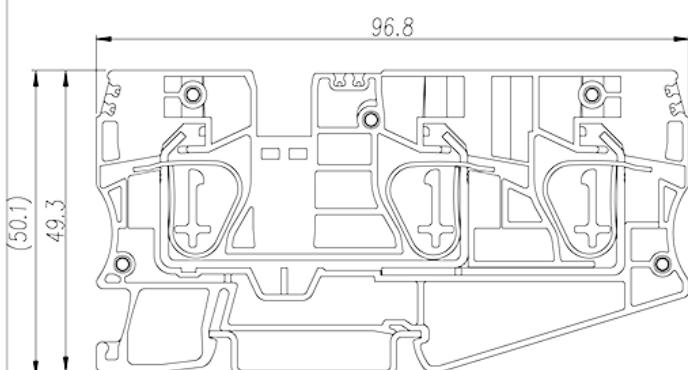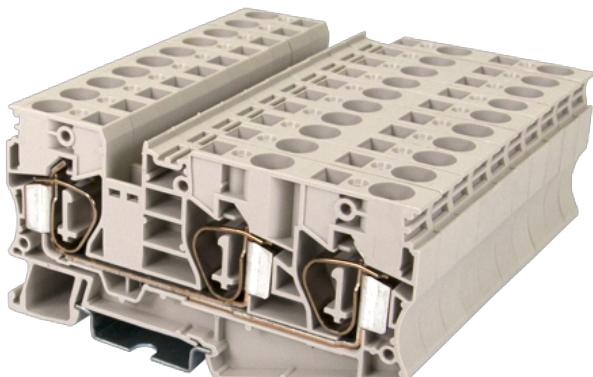

600V, 40A, Beige (default)

	DIN Rail terminal blocks, Feed through terminal blocks
	Feed through terminal blocks
	Beige (default)
	Spring Clamp Connection
	Rail Mounting
(mm)	96.8
(mm)	10
(mm)	49.3
	Single level
	3

UL 94	PA I V0 500M at DC 500V
-------	----------------------------------

-IEC



Delight Through Connections

(V)		800
(A)		57
(III/3)(V)		800
(II/2)(KV)		8
(III/2)(KV)		8
(III/3)(KV)		8
(mm ²)		1.5
(mm ²)		10
(mm ²)		1.5
(mm ²)		10
(mm ²) , , ,		1.5
(mm ²) , , ,		10
(mm ²) , , ,		1.5
(mm ²) , , ,		10
2 (mm ²) , , ,		1.5
2 (mm ²) , , ,		2.5
Width)(mm)	(Blade thickness x	1.0x5.5
		18
		TS-35
		YES
		NO

-UL

(UL/CUL Group B)(V)		600
(UL/CUL Group B)(A)		40
(UL/CUL Group C)(V)		600
(UL/CUL Group C)(A)		40
UL/CUL	AWG	24
UL/CUL	AWG	6
UL/CUL	AWG	24
UL/CUL	AWG	6

&

(YES or NO)	YES
가 (YES or NO)	YES
	120
	-40

UL

(Group B)(AWG)	24~6
(Group B)(V)	600
(Group B)(A)	40
(Group C)(AWG)	24~6
(Group C)(V)	600
(Group C)(A)	40

CUL

(Group B)(AWG)	24~6
(Group B)(V)	600
(Group B)(A)	40
(Group C)(AWG)	24~6
(Group C)(V)	600
(Group C)(A)	40

VDE

(mm ²)	1.5~10
(V)	800
(A)	57



Delight Through Connections

