


# 0150-30XX

PCB &gt; PCB -

:2026-05-14 :1.1

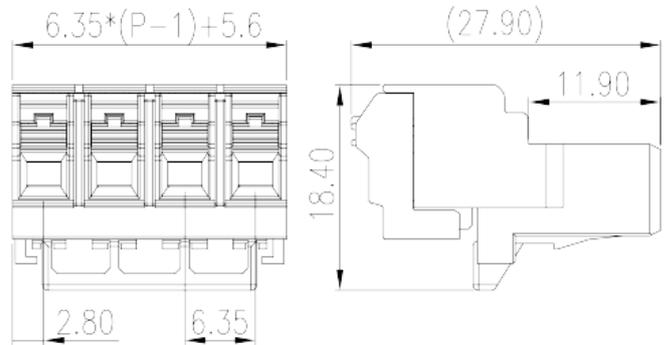

Pitch : 6.35 mm, 600V, 20A

	PCB Connector – Plug, Push-in Design
	PCB Connector – Plug
(mm)	6.35
	Black (default)
	Push in Design
	With lock flange
(mm)	$6.35 * (P - 1) + 5.6$
(mm)	18.4
(mm)	27.9
( )	02P~12P
	Single level
	PA
	I
UL 94	V0
	500M at DC 500V
	COPPER ALLOY

Tin PLATED

**-IEC**

(V)	1000
(A)	20
(II/2)(V)	1000
(III/2)(V)	1000
(III/3)(V)	800
(II/2)(KV)	8
(III/2)(KV)	8
(III/3)(KV)	8
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	2.5
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	2.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	1.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	1.5
	11~12

**-UL**

(UL/CUL Group B)(V)	600
(UL/CUL Group B)(A)	20
(UL/CUL Group C)(V)	600
(UL/CUL Group C)(A)	20
(UL/CUL Group D)(V)	600
(UL/CUL Group D)(A)	5
UL/CUL AWG	24
UL/CUL AWG	12
UL/CUL AWG	24
UL/CUL AWG	12

&amp;

가 (YES or NO)	YES
	120
	-40

UL

(Group B) (AWG)	24~12
(Group B) (V)	600
(Group B) (A)	20
(Group C) (AWG)	24~12
(Group C) (V)	600
(Group C) (A)	20
(Group D) (AWG)	24~12
(Group D) (V)	600
(Group D) (A)	5

CUL

(Group B) (AWG)	24~12
(Group B) (V)	600
(Group B) (A)	20
(Group C) (AWG)	24~12
(Group C) (V)	600
(Group C) (A)	20
(Group D) (AWG)	24~12
(Group D) (V)	600
(Group D) (A)	5

VDE

(mm <sup>2</sup> )	0.2~2.5
(V)	1000
(A)	20

