


# 0150-36XX

PCB > PCB -

:2026-07-04 :V1

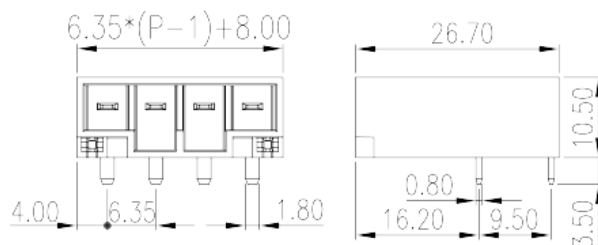

Pitch: 6.35 mm, 600V, 20A

	PCB Connector – Socket, Wave soldering
	PCB Connector – Socket
(mm)	6.35
	Black (default)
	With lock flange
	Wave soldering
(mm)	$6.35 \times (P-1) + 8.0$
(mm)	26.7
(mm)	10.5
( x ) (mm)	0.8x1.8
PCB (mm)	Front: 1.7~1.8 /Back:1*2.65
( )	02P~12P
	Single level
	PBT
	IIIa
UL 94	V0



	1000M at DC 500V
	COPPER ALLOY
	Tin PLATED

**-IEC**

(V)	1000
(A)	20
(II/2)(V)	1000
(III/2)(V)	1000
(III/3)(V)	800
(II/2)(KV)	8
(III/2)(KV)	8
(III/3)(KV)	8

**-UL**

(UL/CUL Group B)(V)	600
(UL/CUL Group B)(A)	20
(UL/CUL Group C)(V)	600
(UL/CUL Group C)(A)	20
(UL/CUL Group D)(V)	600
(UL/CUL Group D)(A)	5

**&**

가 (YES or NO)	YES
	120
	-40

**UL**

(Group B)(V)	600
(Group B)(A)	20
(Group C)(V)	600
(Group C)(A)	20
(Group D)(V)	600
(Group D)(A)	5

## CUL

(Group B)(V)	600
(Group B)(A)	20
(Group C)(V)	600
(Group C)(A)	20
(Group D)(V)	600
(Group D)(A)	5

## VDE

(V)	1000
(A)	20

