


0220-10XX

NEMA

>

:2026-05-14

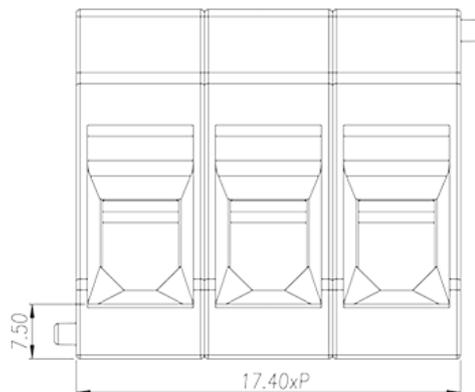

Pitch : 17.40mm, 600V, 115A

	Barrier terminals blocks, Panel Mounting
	Panel Mounting
(mm)	17.40
	Black (default)
	Screw connection
	Panel mounting
(mm)	17.40*P+7
(mm)	60
(mm)	48
	PA66
	I
UL 94	V0
	Copper Alloy
	Tinned

-IEC

(V)	630
(A)	125
(II/2)(V)	1000
(III/2)(V)	1000
(III/3)(V)	630
(II/2)(KV)	8
(III/2)(KV)	8
(III/3)(KV)	8
(mm ²)	16
(mm ²)	35
(mm ²)	16
(mm ²)	35
(mm ²) , ,	16
(mm ²) , ,	16
2 (mm ²)	16
2 (mm ²)	16
	M6
Width)(mm) (Blade thickness x	1.0x5.5
Philips	PH2
(N.m)	Front : 4.5N · m Back : 2N · m
(N.m)	2.5
(N.m)	3
	15~16mm

-UL

(UL/CUL Group B)(V)	600
(UL/CUL Group B)(A)	115
(UL/CUL Group C)(V)	600
(UL/CUL Group C)(A)	115
UL/CUL AWG	6
UL/CUL AWG	2
UL/CUL AWG	6
UL/CUL AWG	2

&

(YES or NO)	YES
가 (YES or NO)	NO
	115
	-40

UL

(Group B)(AWG)	6~2
(Group B)(V)	600
(Group B)(A)	115
(Group C)(AWG)	6~2
(Group C)(V)	600
(Group C)(A)	115

CUL

(Group B)(AWG)	6~2
(Group B)(V)	600
(Group B)(A)	115
(Group C)(AWG)	6~2
(Group C)(V)	600
(Group C)(A)	115

