


0220-11XX

NEMA

>

:2026-02-09

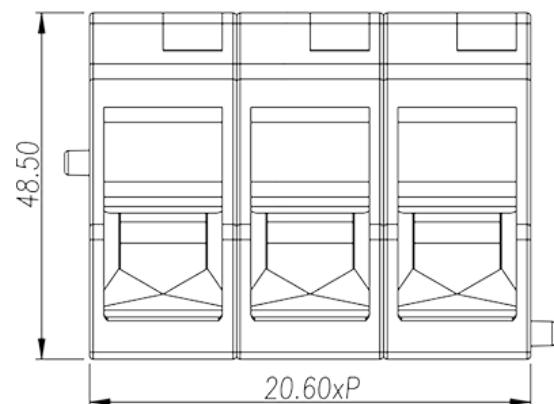

Pitch : 20.60mm, 600V, 150A

	Barrier terminals blocks, Panel Mounting
	Panel Mounting
(mm)	20.60
	Black(default)
	Screw connection
	Panel mounting
(mm)	20.60*P+7
(mm)	73
(mm)	48.5

	PA66
	I
UL 94	V0
	Copper Alloy
	Tinned

-IEC

(V)		1000
(A)		150
(II/2)(V)		1000
(III/2)(V)		1000
(III/3)(V)		1000
(II/2)(KV)		8
(III/2)(KV)		8
(III/3)(KV)		8
(mm ²)		16
(mm ²)		50
(mm ²)		16
(mm ²)		50
(mm ²)	,	16
(mm ²)	,	16
2	(mm ²)	16
2	(mm ²)	16
		M8
Width)(mm)	(Blade thickness x	1.0x5.5
Philips		PH3
(N.m)		Front : 10.7N · m Back : 2.6N · m
(N.m)		3.5
(N.m)		4.2
		21~22mm

-UL

(UL/CUL Group B)(V)		600
(UL/CUL Group B)(A)		150
(UL/CUL Group C)(V)		600
(UL/CUL Group C)(A)		150
UL/CUL	AWG	6
UL/CUL	AWG	1/0
UL/CUL	AWG	6
UL/CUL	AWG	1/0

&



(YES or NO)	YES
가 (YES or NO)	NO
	115
	-40

UL

(Group B)(AWG)	6~1/0
(Group B)(V)	600
(Group B)(A)	150
(Group C)(AWG)	6~1/0
(Group C)(V)	600
(Group C)(A)	150

CUL

(Group B)(AWG)	6~1/0
(Group B)(V)	600
(Group B)(A)	150
(Group C)(AWG)	6~1/0
(Group C)(V)	600
(Group C)(A)	150

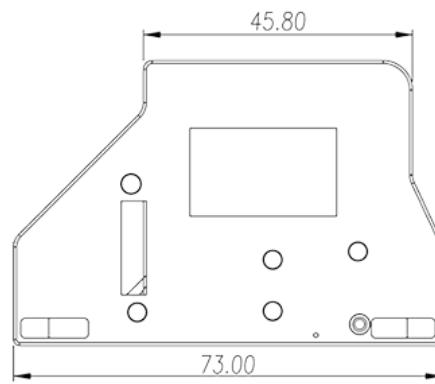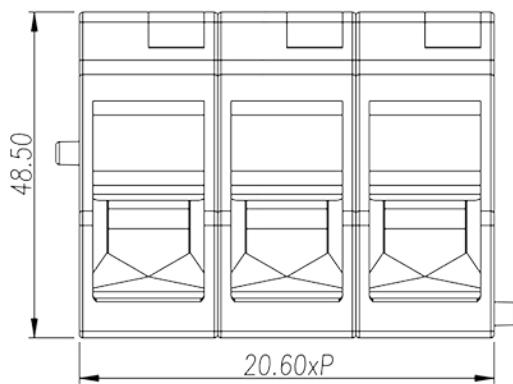



Delight Through Connections

