


AK2.5-TN-TG

DIN

>

:2026-05-14

:1.1

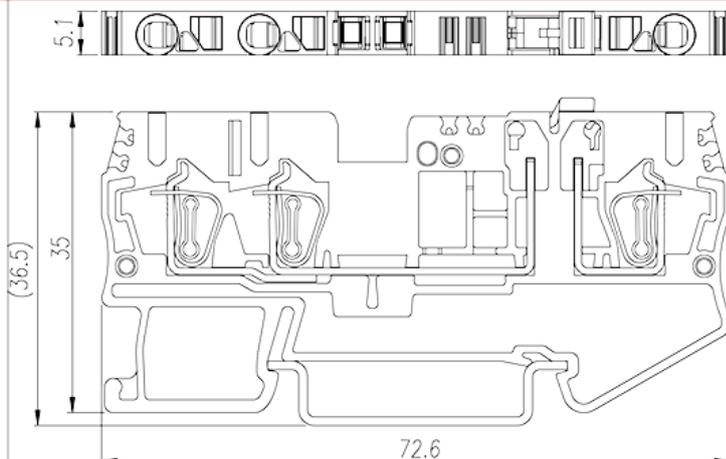

300V, 16A, Beige (default)

	DIN Rail terminal blocks, Disconnect terminal blocks
	Disconnect terminal blocks
	Beige (default)
	Spring Clamp Connection
	Rail Mounting
(mm)	72.6
(mm)	5.1
(mm)	36.7
	Single level
	3
	PA
	I
UL 94	V0
	500M at DC 500V

-IEC



(V)		400
(A)		21
(III/3)(V)		400
(II/2)(KV)		6
(III/2)(KV)		6
(III/3)(KV)		6
(mm ²)		0.2
(mm ²)		4
(mm ²)		0.2
(mm ²)		2.5
(mm ²)	,	0.25
(mm ²)	,	2.5
(mm ²)	,	0.25
(mm ²)	,	2.5
² (mm ²)	,	0.5
² (mm ²)	,	0.5
Width)(mm)	(Blade thickness x	0.6x3.5
		10
		TS-35
		YES
		NO

-UL

(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		16
(UL/CUL Group C)(V)		300
(UL/CUL Group C)(A)		16
(UL/CUL Group D)(V)		600
(UL/CUL Group D)(A)		5
UL/CUL	AWG	28
UL/CUL	AWG	12



UL/CUL	AWG	28
UL/CUL	AWG	12

&

	(YES or NO)	YES
가	(YES or NO)	YES
		120
		-40

UL

	(Group B)(AWG)	28~12
	(Group B)(V)	300
	(Group B)(A)	16
	(Group C)(AWG)	28~12
	(Group C)(V)	300
	(Group C)(A)	16
	(Group D)(AWG)	28~12
	(Group D)(V)	600
	(Group D)(A)	5

CUL

	(Group B)(AWG)	28~12
	(Group B)(V)	300
	(Group B)(A)	16
	(Group C)(AWG)	28~12
	(Group C)(V)	300
	(Group C)(A)	16
	(Group D)(AWG)	28~12
	(Group D)(V)	600
	(Group D)(A)	5

VDE

	(mm ²)	0.2~2.5
	(V)	400
	(A)	21

